

When Recorded Mail To:
American Fork City
51 East Main
American Fork UT 84003

ENT 105724:2021 PG 1 of 51
ANDREA ALLEN
UTAH COUNTY RECORDER
2021 Jun 09 2:43 pm FEE 0.00 BY CS
RECORDED FOR AMERICAN FORK CITY

NOTICE OF INTEREST, BUILDING REQUIREMENTS, AND
ESTABLISHMENT OF RESTRICTIVE COVENANTS

This Notice is recorded to bind the attached Geotechnical Study dated 10/2/2018 along with the site grading plan to the property generally located at 350 S. 900 W. (address), American Fork, UT 84003 and therefore mandating that all construction be in compliance with said Geotechnical Study and site grading plan per the requirements of American Fork City ordinances and standards and specification including specifically Ordinance 07-10-47, Section 6-5, Restrictive Covenant Required and 6-2-4, Liquefiable Soils. Said Sections require establishment of a restrictive covenant and notice to property owners of liquefiable soils or other unique soil conditions and construction methods associated with the property.

- Exhibit A – Legal Description of Property
- Exhibit B – Geotechnical Study
- Exhibit C – Site Grading Plan

Dated this 7th day of JUNE, 2021.

OWNER(S):

Jacob Horan
(Signature)

Scott Smithson
(Signature)

JACOB M. HORAN
(Printed Name)


Scott Smithson
(Printed Name)

MANAGER
(Title)

Owner
(Title)

STATE OF UTAH)
 §
COUNTY OF Utch)

On the 7th day of June, 2021, personally appeared before me Jacob Horan and Scott Smithson, Owner(s) of said Property, as (individuals and/or authorized representatives of a company), and acknowledged to me that such individuals or company executed the within instrument freely of their own volition and pursuant to the articles of organization where applicable.

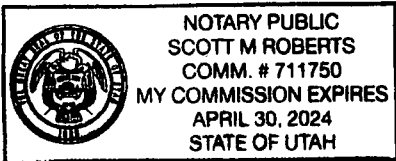

Scott M Roberts
Notary Public
My Commission Expires: 4/30/24

Exhibit A

Block 1 Plat A

BEGINNING AT A POINT WHICH IS NORTH 1691.58 FEET AND WEST 328.18 FEET FROM THE SOUTH QUARTER CORNER OF SECTION 22, TOWNSHIP 5 SOUTH, RANGE 1 EAST; AND RUNNING: THENCE NORTH $89^{\circ}13'03''$ WEST 98.64 FEET; THENCE NORTH $00^{\circ}42'16''$ EAST 448.37 FEET; THENCE NORTH $00^{\circ}29'16''$ EAST 131.64 FEET; THENCE NORTH $89^{\circ}40'40''$ WEST 117.41 FEET; THENCE NORTH $00^{\circ}53'51''$ EAST 260.23 FEET; THENCE SOUTH $89^{\circ}23'31''$ EAST 191.55 FEET; THENCE ALONG THE ARC OF A 20.00 FOOT RADIUS CURVE TO THE RIGHT A DISTANCE OF 30.55 FEET (CURVE HAVING A CENTRAL ANGLE OF $87^{\circ}21'13''$ AND A LONG CHORD BEARING $S45^{\circ}40'37''E$ 27.67 FEET); THENCE SOUTH $00^{\circ}46'02''$ WEST 16.30 FEET; THENCE SOUTH $06^{\circ}04'09''$ EAST 42.00 FEET; THENCE SOUTH $00^{\circ}46'05''$ WEST 762.82 FEET TO THE POINT OF BEGINNING. THE ABOVE DESCRIBED PARCEL CONTAINS 113,433 SQUARE FEET IN AREA OR 2.60 ACRES. (NOTE: ALL BEARINGS IN THE ABOVE DESCRIPTION ARE BASED ON THE NAD 27 BEARING OF $N 89^{\circ}52'20'' E$ ALONG THE SECTION LINE FROM THE SOUTH QUARTER CORNER OF SECTION 22, TOWNSHIP 5 SOUTH, RANGE 1 EAST TO THE SOUTHEAST CORNER OF SAID SECTION 22.) NUMBER OF LOTS 31 NUMBER OF PARCELS 1

Block 1 Plat B

BEGINNING AT A POINT WHICH IS NORTH 1692.67 FEET AND WEST 426.82 FEET FROM THE SOUTH QUARTER CORNER OF SECTION 22, TOWNSHIP 5 SOUTH, RANGE 1 EAST; AND RUNNING: THENCE NORTH $89^{\circ}13'03''$ WEST 98.99 FEET; THENCE NORTH 579.21 FEET; THENCE SOUTH $89^{\circ}40'40''$ EAST 105.62 FEET; THENCE SOUTH $00^{\circ}29'16''$ WEST 131.64 FEET; THENCE SOUTH $00^{\circ}42'16''$ WEST 448.37 FEET TO THE POINT OF BEGINNING. THE ABOVE DESCRIBED PARCEL CONTAINS 59,405 SQUARE FEET IN AREA OR 1.36 ACRES. (NOTE: ALL BEARINGS IN THE ABOVE DESCRIPTION ARE BASED ON THE NAD 27 BEARING OF N $89^{\circ}52'20''$ E ALONG THE SECTION LINE FROM THE SOUTH QUARTER CORNER OF SECTION 22, TOWNSHIP 5 SOUTH, RANGE 1 EAST TO THE SOUTHEAST CORNER OF SAID SECTION 22.) NUMBER OF LOTS 1

Block 2 Plat C

BEGINNING AT A POINT WHICH IS NORTH 1687.51 FEET AND WEST 30.71 FEET FROM THE SOUTH QUARTER CORNER OF SECTION 22, TOWNSHIP 5 SOUTH, RANGE 1 EAST; AND RUNNING: THENCE NORTH $89^{\circ}13'03''$ WEST 218.51 FEET; THENCE NORTH $00^{\circ}46'05''$ EAST 730.43 FEET; THENCE SOUTH $89^{\circ}15'29''$ EAST 98.77 FEET; THENCE SOUTH $00^{\circ}44'31''$ WEST 418.58 FEET; THENCE SOUTH $53^{\circ}26'45''$ EAST 3.91 FEET; THENCE SOUTH $00^{\circ}48'57''$ WEST 132.38 FEET; THENCE ALONG THE ARC OF A 21.00 FOOT RADIUS CURVE TO THE LEFT A DISTANCE OF 33.00 FEET (CURVE HAVING A CENTRAL ANGLE $90^{\circ}02'15''$ AND A LONG CHORD BEARS $S44^{\circ}16'37''E$ 29.71 FEET); THENCE SOUTH $89^{\circ}17'44''$ EAST 95.51 FEET; THENCE SOUTH $00^{\circ}47'10''$ WEST 156.40 FEET TO THE POINT OF BEGINNING. THE ABOVE DESCRIBED PARCEL CONTAINS 91,513 SQUARE FEET IN AREA OR 2.10 ACRES. (NOTE: ALL BEARINGS IN THE ABOVE DESCRIPTION ARE BASED ON THE NAD 27 BEARING OF $N 89^{\circ}52'20'' E$ ALONG THE SECTION LINE FROM THE SOUTH QUARTER CORNER OF SECTION 22, TOWNSHIP 5 SOUTH, RANGE 1 EAST TO THE SOUTHEAST CORNER OF SAID SECTION 22.)
NUMBER OF LOTS 27 NUMBER OF PARCELS 1

Block 2 Plat D

BEGINNING AT A POINT WHICH IS NORTH 1843.64 FEET AND WEST 28.48 FEET FROM THE SOUTH QUARTER CORNER OF SECTION 22, TOWNSHIP 5 SOUTH, RANGE 1 EAST; AND RUNNING THENCE NORTH $89^{\circ}17'44''$ WEST 95.51 FEET; THENCE ALONG THE ARC OF A 21.00 FOOT RADIUS CURVE TO THE RIGHT A DISTANCE OF 33.00 FEET (CURVE HAVING A CENTRAL ANGLE $90^{\circ}02'15''$ AND A LONG CHORD BEARS $N44^{\circ}16'37''W$ 29.71 FEET); THENCE NORTH $00^{\circ}48'57''$ EAST 132.38 FEET; THENCE NORTH $53^{\circ}26'45''$ WEST 3.91 FEET; THENCE NORTH $00^{\circ}44'31''$ EAST 271.25 FEET; THENCE NORTH $89^{\circ}15'29''$ WEST 98.77 FEET; THENCE NORTH $00^{\circ}46'05''$ EAST 32.41 FEET; THENCE NORTH $07^{\circ}36'20''$ EAST 38.25 FEET; THENCE NORTH $00^{\circ}46'05''$ EAST 15.51 FEET; THENCE ALONG THE ARC OF A 20.00 FOOT RADIUS CURVE TO THE RIGHT A DISTANCE OF 30.43 FEET (CURVE HAVING A CENTRAL ANGLE $87^{\circ}10'52''$ AND A LONG CHORD BEARS $N44^{\circ}21'37''E$ 27.58 FEET); THENCE ALONG THE ARC OF A 503.00 FOOT RADIUS CURVE TO THE LEFT A DISTANCE OF 79.47 FEET (CURVE HAVING A CENTRAL ANGLE $09^{\circ}03'09''$ AND A LONG CHORD BEARS $N83^{\circ}25'35''E$ 79.39 FEET); THENCE NORTH $78^{\circ}54'02''$ EAST 120.20 FEET; THENCE ALONG THE ARC OF A 447.00 FOOT RADIUS CURVE TO THE RIGHT A DISTANCE OF 14.89 FEET (CURVE HAVING A CENTRAL ANGLE $01^{\circ}54'30''$ AND A LONG CHORD BEARS $N79^{\circ}51'16''E$ 14.89 FEET); THENCE SOUTH $01^{\circ}00'42''$ WEST 448.93 FEET; THENCE SOUTH $01^{\circ}30'56''$ WEST 425.15 FEET; THENCE NORTH $89^{\circ}13'03''$ WEST 8.60 FEET; THENCE NORTH $00^{\circ}47'10''$ EAST 156.40 FEET TO THE POINT OF BEGINNING. THE ABOVE DESCRIBED PARCEL CONTAINS 125,535 SQUARE FEET IN AREA OR 2.88 ACRES. (NOTE: ALL BEARINGS IN THE ABOVE DESCRIPTION ARE BASED ON THE NAD 27 BEARING OF $N 89^{\circ}52'20'' E$ ALONG THE SECTION LINE FROM THE SOUTH QUARTER CORNER OF SECTION 22, TOWNSHIP 5 SOUTH, RANGE 1 EAST TO THE SOUTHEAST CORNER OF SAID SECTION 22.) NUMBER OF LOTS 1
NUMBER OF PARCELS 2

Block 3 Plat E

BEGINNING AT A POINT WHICH IS NORTH 1247.17 FEET AND WEST 487.83 FEET FROM THE SOUTH QUARTER CORNER OF SECTION 22, TOWNSHIP 5 SOUTH, RANGE 1 EAST; AND RUNNING: THENCE SOUTH 57°57'04" WEST 107.51 FEET; THENCE NORTH 39°27'15" WEST 70.27 FEET; THENCE SOUTH 89°16'09" EAST 67.23 FEET; THENCE NORTH 02°32'00" EAST 86.36 FEET; THENCE SOUTH 89°08'21" EAST 91.24 FEET; THENCE NORTH 01°38'03" EAST 75.62 FEET; THENCE NORTH 12°45'06" EAST 135.61 FEET; THENCE NORTH 00°51'39" EAST 156.66 FEET; THENCE SOUTH 89°13'03" EAST 98.72 FEET; THENCE SOUTH 00°46'05" WEST 164.55 FEET; THENCE ALONG THE ARC OF A 335.50 FOOT RADIUS CURVE TO THE RIGHT A DISTANCE OF 334.84 FEET (CURVE HAVING A CENTRAL ANGLE OF 57°10'58" AND A LONG CHORD BEARING S29°21'35"W 321.11 FEET) TO THE POINT OF BEGINNING. THE ABOVE DESCRIBED PARCEL CONTAINS 49,116 SQUARE FEET IN AREA OR 1.13 ACRES. (NOTE: ALL BEARINGS IN THE ABOVE DESCRIPTION ARE BASED ON THE NAD 27 BEARING OF N 89°52'20" E ALONG THE SECTION LINE FROM THE SOUTH QUARTER CORNER OF SECTION 22, TOWNSHIP 5 SOUTH, RANGE 1 EAST TO THE SOUTHEAST CORNER OF SAID SECTION 22.) NUMBER OF LOTS 12 NUMBER OF PARCELS 1

Block 3 Plat F

BEGINNING AT A POINT WHICH IS NORTH 1328.17 FEET AND WEST 461.34 FEET FROM THE SOUTH QUARTER CORNER OF SECTION 22, TOWNSHIP 5 SOUTH, RANGE 1 EAST; AND RUNNING: THENCE NORTH $89^{\circ}08'21''$ WEST 64.47 FEET; THENCE NORTH 364.88 FEET; THENCE SOUTH $89^{\circ}13'03''$ EAST 98.91 FEET; THENCE SOUTH $00^{\circ}51'39''$ WEST 156.66 FEET; THENCE SOUTH $12^{\circ}45'06''$ WEST 135.61 FEET; THENCE SOUTH $01^{\circ}38'03''$ WEST 75.62 FEET TO THE POINT OF BEGINNING. THE ABOVE DESCRIBED PARCEL CONTAINS 31,089 SQUARE FEET IN AREA OR 0.71 ACRES. (NOTE: ALL BEARINGS IN THE ABOVE DESCRIPTION ARE BASED ON THE NAD 27 BEARING OF $N 89^{\circ}52'20'' E$ ALONG THE SECTION LINE FROM THE SOUTH QUARTER CORNER OF SECTION 22, TOWNSHIP 5 SOUTH, RANGE 1 EAST TO THE SOUTHEAST CORNER OF SAID SECTION 22.)
NUMBER OF LOTS 1

Block 4 Plat H

BEGINNING AT A POINT WHICH IS NORTH 1134.59 FEET AND WEST 29.54 FEET FROM THE SOUTH QUARTER CORNER OF SECTION 22, TOWNSHIP 5 SOUTH, RANGE 1 EAST; AND RUNNING: THENCE NORTH $89^{\circ}04'08''$ WEST 137.29 FEET; THENCE NORTH $46^{\circ}17'43''$ WEST 54.66 FEET; THENCE NORTH $44^{\circ}45'12''$ EAST 24.26 FEET; THENCE NORTH $45^{\circ}47'22''$ WEST 69.07 FEET; THENCE NORTH $45^{\circ}17'41''$ EAST 42.27 FEET; THENCE NORTH $16^{\circ}47'47''$ EAST 209.48 FEET; THENCE NORTH $00^{\circ}44'31''$ EAST 218.59 FEET; THENCE SOUTH $89^{\circ}13'03''$ EAST 123.26 FEET; THENCE SOUTH $00^{\circ}46'15''$ WEST 552.60 FEET TO THE POINT OF BEGINNING. THE ABOVE DESCRIBED PARCEL CONTAINS 81,268 SQUARE FEET IN AREA OR 1.87 ACRES. (NOTE: ALL BEARINGS IN THE ABOVE DESCRIPTION ARE BASED ON THE NAD 27 BEARING OF N $89^{\circ}52'20''$ E ALONG THE SECTION LINE FROM THE SOUTH QUARTER CORNER OF SECTION 22, TOWNSHIP 5 SOUTH, RANGE 1 EAST TO THE SOUTHEAST CORNER OF SAID SECTION 22.)
NUMBER OF LOTS 1


Block 5 Plat I

BEGINNING AT A POINT WHICH IS NORTH 838.47 FEET AND WEST 774.05 FEET FROM THE SOUTH QUARTER CORNER OF SECTION 22, TOWNSHIP 5 SOUTH, RANGE 1 EAST; AND RUNNING: THENCE SOUTH 00°00'09" WEST 93.64 FEET; THENCE ALONG THE ARC OF A 83.00 FOOT RADIUS CURVE TO THE RIGHT A DISTANCE OF 30.20 FEET (CURVE HAVING A CENTRAL ANGLE 20°50'59" AND A LONG CHORD BEARS S10°25'38"W 30.04 FEET); THENCE SOUTH 00°00'09" WEST 99.68 FEET; THENCE NORTH 89°01'53" WEST 140.27 FEET; THENCE NORTH 01°03'29" EAST 630.12 FEET; THENCE SOUTH 89°16'08" EAST 284.53 FEET; THENCE SOUTH 39°27'15" EAST 70.27 FEET; THENCE SOUTH 57°57'04" WEST 0.65 FEET; THENCE ALONG THE ARC OF A 414.50 FOOT RADIUS CURVE TO THE LEFT A DISTANCE OF 419.22 FEET (CURVE HAVING A CENTRAL ANGLE 57°56'55" AND A LONG CHORD BEARS S28°58'36"W 401.58 FEET) TO THE POINT OF BEGINNING. THE ABOVE DESCRIBED PARCEL CONTAINS 117,276 SQUARE FEET IN AREA OR 2.69 ACRES. (NOTE: ALL BEARINGS IN THE ABOVE DESCRIPTION ARE BASED ON THE NAD 27 BEARING OF N 89°52'20" E ALONG THE SECTION LINE FROM THE SOUTH QUARTER CORNER OF SECTION 22, TOWNSHIP 5 SOUTH, RANGE 1 EAST TO THE SOUTHEAST CORNER OF SAID SECTION 22.)
NUMBER OF LOTS 28 NUMBER OF PARCELS 2

Block 6 Plat J

BEGINNING AT A POINT WHICH IS NORTH 631.89 FEET AND WEST 550.59 FEET FROM THE SOUTH QUARTER CORNER OF SECTION 22, TOWNSHIP 5 SOUTH, RANGE 1 EAST; AND RUNNING: THENCE WEST 123.38 FEET; THENCE ALONG THE ARC OF A 50.00 FOOT RADIUS CURVE TO THE LEFT A DISTANCE OF 22.75 FEET (CURVE HAVING A CENTRAL ANGLE 26°04'11" AND A LONG CHORD BEARS N47°05'26"W 22.55 FEET); THENCE NORTH 00°00'09" EAST 72.01 FEET; THENCE ALONG THE ARC OF A 90.00 FOOT RADIUS CURVE TO THE RIGHT A DISTANCE OF 28.81 FEET (CURVE HAVING A CENTRAL ANGLE 18°20'34" AND A LONG CHORD BEARS N09°10'08"W 28.69 FEET); THENCE NORTH 00°00'09" EAST 90.88 FEET; THENCE ALONG THE ARC OF A 335.50 FOOT RADIUS CURVE TO THE RIGHT A DISTANCE OF 161.04 FEET (CURVE HAVING A CENTRAL ANGLE 27°30'07" AND A LONG CHORD BEARS N13°45'12"E 159.50 FEET); THENCE SOUTH 54°25'22" EAST 75.79 FEET; THENCE ALONG THE ARC OF A 178.00 FOOT RADIUS CURVE TO THE LEFT A DISTANCE OF 39.75 FEET (CURVE HAVING A CENTRAL ANGLE 12°47'38" AND A LONG CHORD BEARS S60°49'11"W 39.66 FEET); THENCE SOUTH 00°49'10" WEST 279.01 FEET; THENCE SOUTH 36°45'44" EAST 23.83 FEET TO THE POINT OF BEGINNING. THE ABOVE DESCRIBED PARCEL CONTAINS 42,264 SQUARE FEET IN AREA OR 0.97 ACRES. (NOTE: ALL BEARINGS IN THE ABOVE DESCRIPTION ARE BASED ON THE NAD 27 BEARING OF N 89°52'20" E ALONG THE SECTION LINE FROM THE SOUTH QUARTER CORNER OF SECTION 22, TOWNSHIP 5 SOUTH, RANGE 1 EAST TO THE SOUTHEAST CORNER OF SAID SECTION 22.) NUMBER OF LOTS 11
NUMBER OF PARCELS 1

Exhibit B



1497 West 40 South
Lindon, Utah - 84042
Phone (801) 225-5711

3662 West 2100 South
Salt Lake City, Utah - 84120
Phone (801) 787-9138

1596 W. 2650 S. #108
Ogden, Utah - 84401
Phone (801) 399-9516

**Geotechnical Study
900 West Townhomes
Approximately 400 South 900 West
American Fork, Utah**

Project No. 188944

October 2, 2018

Prepared For:

Ascent Development Group, LLC
Attention: Ms. Ginger Romriell
555 South State Street, Ste 300
Orem, UT 84058


Prepared By:

EARTHTEC ENGINEERING
Lindon Office



CERTIFICATE

I hereby certify that I am a licensed professional engineer, as defined in the "Sensitive Lands Ordinance" Section of American Fork City Ordinances. I have examined this report to which this certificate is attached and the information and conclusions contained therein are, without any reasonable reservation not stated therein, accurate and complete. Procedures and tests used in this report meet minimum applicable professional standards.



Timothy A. Mitchell, P.E.
Senior Geotechnical Engineer



TABLE OF CONTENTS

1.0 EXECUTIVE SUMMARY 1

2.0 INTRODUCTION..... 2

3.0 PROPOSED CONSTRUCTION 2

4.0 GENERAL SITE DESCRIPTION..... 3

 4.1 Site Description 3

 4.2 Geologic Setting..... 3

5.0 SUBSURFACE EXPLORATION 3

 5.1 Soil Exploration 3

6.0 LABORATORY TESTING..... 4

7.0 SUBSURFACE CONDITIONS..... 5

 7.1 Soil Types 5

 7.2 Groundwater Conditions..... 6

8.0 SITE GRADING..... 6

 8.1 General Site Grading 6

 8.2 Temporary Excavations..... 6

 8.3 Fill Material Composition 6

 8.4 Fill Placement and Compaction..... 8

 8.5 Stabilization Recommendations 8

9.0 SEISMIC AND GEOLOGIC CONSIDERATIONS..... 9

 9.1 Seismic Design 9

 9.2 Faulting..... 10

 9.3 Liquefaction Potential 10

10.0 FOUNDATIONS 10

 10.1 General 10

 10.2 Strip/Spread Footings 11

 10.3 Estimated Settlements..... 12

 10.4 Lateral Load Resistance 12

11.0 FLOOR SLABS AND FLATWORK..... 12

12.0 DRAINAGE 13

 12.1 Surface Drainage..... 13

 12.2 Subsurface Drainage 14

13.0 PAVEMENT RECOMMENDATIONS..... 14

14.0 GENERAL CONDITIONS..... 15



TABLE OF CONTENTS (CONTINUED)

TABLES

Table 1: Laboratory Test Results 5
Table 2: Structural Fill Recommendations 7
Table 3: Free-Draining Fill Recommendations 7
Table 4: Design Accelerations 9
Table 5: Pavement Section Recommendations 14

ATTACHED FIGURES

No. 1 VICINITY MAP
No. 2 AERIAL PHOTOGRAPH SHOWING LOCATION OF BORING AND TEST
PITS
Nos. 3 – 10 BORING AND TEST PIT LOGS
No. 11 LEGEND
Nos. 12 – 16 CONSOLIDATION-SWELL TEST

APPENDIX A

Timpview Analytical Labs



1.0 EXECUTIVE SUMMARY

This entire report presents the results of Earthtec Engineering's completed geotechnical study for the 900 West Townhomes in American Fork, Utah. This executive summary provides a general synopsis of our recommendations and findings. Details of our findings, conclusions, and recommendations are provided within the body of this report.

- The subject property is approximately 20.4 acres and is proposed to be developed with the construction of multiple apartment buildings and townhomes. The proposed structures will consist of conventionally framed, two- to three-story, slab-on-grade buildings. We anticipate foundation loads for the proposed structures will not exceed 5,000 pounds per linear foot for bearing wall, 40,000 pounds for column loads, and 100 pounds per square foot for floor slabs. (see Section 3)
- Our field exploration included the boring of one (1) boring and the excavation of seven (7) test pits to depths of 10½ to 31½ feet below the existing ground surface. Groundwater was encountered at depths of approximately 4 to 12 feet below the existing ground surface. (see Section 5)
- The native clay soils have a slight to moderate potential for collapse (settlement) and a slight to high potential for compressibility under increased moisture contents and anticipated load conditions. (see Section 6)
- The subsurface soils encountered generally consisted of topsoil overlying near-surface soft to medium stiff clay and silt, and medium dense sand. All topsoil should be removed beneath the entire building footprints, exterior flatwork, and pavements prior to construction. (see Section 7)
- The silt layers between depths of 25 to 31½ feet have a "High" potential for liquefaction during a moderate to large earthquake event; should this layer liquefy, we estimate that up to 1¼ inches of liquefaction-induced settlement and up to ½ feet of liquefaction-induced lateral movements could occur. (see Section 9)
- Conventional strip and spread footings may be used to support the structures, with foundations placed entirely on a minimum of 24 inches of properly placed, compacted, and tested structural fill extending to undisturbed native soils. (see Section 10)
- Minimum roadway section consists of 3 inches of asphalt over 14 inches of road-base. Areas that are soft or deflect under construction traffic should be removed and replaced with granular material or structural fill. (see Section 13)

Based on the results of our field exploration, laboratory testing, and engineering analyses, it is our opinion that the subject site may be suitable for the proposed development, provided the recommendations presented in this report are followed and implemented during design and construction.



Failure to consult with Earthtec Engineering (Earthtec) regarding any changes made during design and/or construction of the project from those discussed herein relieves Earthtec from any liability arising from changed conditions at the site. We also strongly recommend that Earthtec observes the building excavations to verify the adequacy of our recommendations presented herein, and that Earthtec performs materials testing and special inspections for this project to provide continuity during construction.

2.0 INTRODUCTION

The project is located at approximately 400 South 900 West in American Fork, Utah. The general location of the site is shown on Figure No. 1, *Vicinity Map* and Figure No. 2, *Aerial Photograph Showing Location of Boring and Test Pit*, at the end of this report. The purposes of this study are to:

- Evaluate the subsurface soil conditions at the site,
- Assess the engineering characteristics of the subsurface soils, and
- Provide geotechnical recommendations for general site grading and the design and construction of foundations, concrete floor slabs, miscellaneous concrete flatwork, and asphalt paved parking and drive areas.

The scope of work completed for this study included field reconnaissance, subsurface exploration, field and laboratory soil testing, geotechnical engineering analysis, and the preparation of this report.

3.0 PROPOSED CONSTRUCTION

We understand that the proposed project, as described to us by Ms. Ginger Romriell with Ascent Development Group, LLC, consists of developing the approximately 20.4-acre existing parcel with the construction of multiple apartment buildings and townhomes. The proposed structures will consist of conventionally framed, two- to three-story, slab-on-grade buildings. We have based our recommendations in this report that anticipated foundation loads for the proposed structures will not exceed 5,000 pounds per linear foot for bearing wall, 40,000 pounds for column loads, and 100 pounds per square foot for floor slabs. If structural loads will be greater Earthtec should be notified so that we may review our recommendations and make modifications, if necessary.

In addition to the construction described above, we anticipate that

- Utilities will be installed to service the proposed buildings,
- Exterior concrete flatwork will be placed in the form of curb, gutter, and sidewalks, and
- Asphalt paved parking and drive areas will be constructed.



4.0 GENERAL SITE DESCRIPTION

4.1 Site Description

At the time of our subsurface exploration the site consisted of agricultural fields. The ground surface appears to be relatively flat, we anticipate less than 3 feet of cut and fill may be required for site grading. The lot was bounded on all sides by undeveloped agricultural fields.

4.2 Geologic Setting

The subject property is located in the central portion of Utah Valley near the eastern shore of Utah Lake. Utah Valley is a deep, sediment-filled basin that is part of the Basin and Range Physiographic Province. The valley was formed by extensional tectonic processes during the Tertiary and Quaternary geologic time periods. The valley is bordered by the Wasatch Mountain Range on the east and the Lake Mountains on the west. Much of northwestern Utah, including Utah Valley, was previously covered by the Pleistocene age Lake Bonneville. Utah Lake, which currently covers much of the western portion of the valley, is a remnant of this ancient fresh water lake. The surficial geology of much of the eastern margin of the valley has been mapped by Constenius, 2011¹. The surficial geology at the location of the subject site and adjacent properties is mapped as "Fine-grained lacustrine deposits" (Map Unit Qlf) dated to upper Pleistocene. These soil or deposits are generally described in the referenced mapping as "silt and clay with some fine-grained sand."

5.0 SUBSURFACE EXPLORATION

5.1 Soil Exploration

Under the direction of a qualified member of our geotechnical staff, subsurface explorations were conducted at the site on September 11 and 12, 2018 by the boring of one (1) boring and the excavation of seven (7) test pits to depths of 10½ to 31½ feet below the existing ground surface using an all-terrain hydraulic drill rig and a track-mounted mini excavator, respectively. The approximate locations of the boring and test pits are shown on Figure No. 2, *Aerial Photograph Showing Location of Boring and Test Pits*. Graphical representations and detailed descriptions of the soils encountered are shown on Figure Nos. 3 through 10, *Boring and Test Pit Log* at the end of this report. The stratification lines shown on the logs represent the approximate boundary between soil units; the actual transition may be gradual. Due to potential natural variations inherent in soil deposits, care should be taken in interpolating between and extrapolating beyond exploration points. A key to the symbols and terms on the logs is presented on Figure No. 11, *Legend*.

As required by the American Fork Sensitive Lands Ordinance a 70-foot boring is required to

¹ Constenius, K.N., Clark, D.L., King, J.K., Ehler, J.B., 2011, Interim Geologic Map of the Provo Quadrangle, *Utah, Wasatch and Salt Lake Counties, Utah*; U.S. Geological Survey, Open-File 586DM, Scale 1: 62,500.



have been performed within 2,000 feet of the site. The boring labeled AF-06-3 is within 2,000 feet of the site.

Samples of the subsurface soils were collected in the borings at depth intervals of approximately 2½ to 5 feet. Relatively undisturbed samples were collected by pushing thin-walled "Shelby" tubes into undisturbed soils below the augers. Disturbed samples were collected with a 1¾ inch inside diameter split spoon sampler. The split spoon sampler was driven 18 inches into undisturbed soil with a 140-pound hammer free-falling through a distance of 30 inches. The blows required to drive the sampler through the final 12 inches of penetration is called the "N-value" or "blow count," and is recorded as "blows per foot" on the attached boring logs at the respective sample depths. The blow count provides a reasonable indication of the in-place relative density of sandy soils but provides only a limited indication of the relative stiffness of cohesive (clayey) materials, since the penetration resistance for these soils is a function of the moisture content. Disturbed bag samples and relatively undisturbed block samples were collected at various depths in each test pit.

The soil samples collected were classified by visual examination in the field following the guidelines of the Unified Soil Classification System (USCS). The samples were transported to our Lindon, Utah laboratory where they will be retained for 30 days following the date of this report and then discarded, unless a written request for additional holding time is received prior to the 30-day limit.

6.0 LABORATORY TESTING

Representative soil samples collected during our field exploration were tested in the laboratory to assess pertinent engineering properties and to aid in refining field classifications, if needed. Tests performed included natural moisture content, dry density tests, liquid and plastic limits determinations, mechanical (partial) gradation analyses, and one-dimensional consolidation tests. The table below summarizes the laboratory test results, which are also included on the attached *Boring and Test Pit Logs* at the respective sample depths, and on Figure Nos. 12 through 16, *Consolidation-Swell Test*.



Table 1: Laboratory Test Results

Boring and Test Pit No.	Depth (ft.)	Natural Moisture (%)	Natural Dry Density (pcf)	Atterberg Limits		Grain Size Distribution (%)			Soil Type
				Liquid Limit	Plasticity Index	Gravel (+ #4)	Sand	Silt/Clay (- #200)	
B-1	5	22	98	31	8	6	12	82	CL
B-1	15	19	---	24	7	1	23	76	CL-ML
B-1	25	---	---	18	NP*	---	---	---	ML
TP-1	3½	26	93	36	18	0	7	93	CL
TP-2	5	---	---	32	11	---	---	---	CL
TP-3	4	24	95	38	19	1	11	88	CL
TP-4	7	28	---	39	17	---	---	---	CL
TP-5	2½	9	97	36	15	1	13	86	CL
TP-6	7½	29	91	42	20	6	5	89	CL
TP-7	3½	18	---	25	6	2	28	70	CL-ML

NP* = Non-Plastic

As part of the consolidation test procedure, water was added to the samples to assess moisture sensitivity when the samples were loaded to an equivalent pressure of approximately 1,000 psf. The native clay soils have a slight to moderate potential for collapse (settlement) and a slight to high potential for compressibility under increased moisture contents and anticipated load conditions.

A water-soluble sulfate test was performed on a representative sample obtained during our field exploration. Testing indicated a value of 47 parts per million. Based on this result, the risk of sulfate attack to concrete appears to be "negligible" according to American Concrete Institute standards. Therefore, any type of Portland cement may be used for concrete in contact with on-site soils. The results can be found in Appendix A.

7.0 SUBSURFACE CONDITIONS

7.1 Soil Types

On the surface of the site, we encountered topsoil which is estimated to extend up to 1½ feet in depth at the boring and test pit locations. Below the topsoil we encountered layers of clay, silt and sand extending to depths of 10½ to 31½ feet below the existing ground surface. Graphical representations and detailed descriptions of the soils encountered are shown on Figure Nos. 3 through 10, *Boring and Test Pit Log* at the end of this report. Based on the blow counts obtained and our experience and observations during field exploration, the clay and silt soils ranged from soft to medium stiff in consistency and the sand soils visually had a relative density of medium dense.

It should be considered that small diameter soil borings were used during the course of our



subsurface exploration. Variation in topsoil depths may occur at the site.

7.2 Groundwater Conditions

Groundwater was encountered at depths of approximately 4 to 12 feet below the existing ground surface. Note that groundwater levels will fluctuate in response to the season, precipitation, snow melt, irrigation, and other on and off-site influences. Quantifying these fluctuations would require long term monitoring, which is beyond the scope of this study. The contractor should be prepared to dewater excavations as needed.

8.0 SITE GRADING

8.1 General Site Grading

All surface vegetation and unsuitable soils (such as topsoil, organic soils, undocumented fill, soft, loose, or disturbed native soils, and any other inapt materials) should be removed from below foundations, floor slabs, exterior concrete flatwork, and pavement areas. We encountered topsoil on the surface of the site. The topsoil (including soil with roots larger than about ¼ inch in diameter) should be completely removed, even if found to extend deeper, along with any other unsuitable soils that may be encountered. Over-excavations below footings and slabs also may be needed, as discussed in Section 10.0.

Fill placed over large areas, even if only a few feet in depth, can cause consolidation in the underlying native soils resulting in settlement of the fill. Because the site is relatively flat, we anticipate that less than 3 feet of grading fill will be placed. If more than 3 feet of grading fill will be placed above the existing surface (to raise site grades), Earthtec should be notified so that we may provide additional recommendations, if required. Such recommendations will likely include placing the fill several weeks (or possibly more) prior to construction to allow settlement to occur.

8.2 Temporary Excavations

Temporary excavations that are less than 4 feet in depth and above groundwater should have side slopes no steeper than ½H:1V (Horizontal:Vertical). Temporary excavations where water is encountered in the upper 4 feet or that extend deeper than 4 feet below site grades should be sloped or braced in accordance with OSHA² requirements for Type C soils. ...

8.3 Fill Material Composition

The native soils are not suitable for use as placed and compacted structural fill. Excavated soils, including clay and silt, may be stockpiled for use as fill in landscape areas.

Structural fill is defined as fill material that will ultimately be subjected to any kind of structural

² OSHA Health And Safety Standards, Final Rule, CFR 29, part 1926.



loading, such as those imposed by footings, floor slabs, pavements, etc. We recommend that a professional engineer or geologist verify that the structural fill to be used on this project meets the requirements, stated below. We recommend that structural fill consist of imported sandy/gravelly soils meeting the following requirements in the table below:

Table 2: Structural Fill Recommendations

Sieve Size/Other	Percent Passing (by weight)
4 inches	100
3/4 inches	70 – 100
No. 4	40 – 80
No. 40	15 – 50
No. 200	0 – 20
Liquid Limit	35 maximum
Plasticity Index	15 maximum

In some situations, particles larger than 4 inches and/or more than 30 percent coarse gravel may be acceptable but would likely make compaction more difficult and/or significantly reduce the possibility of successful compaction testing. Consequently, stricter quality control measures than normally used may be required, such as using thinner lifts and increased or full-time observation of fill placement.

We recommend that utility trenches below any structural load be backfilled using structural fill. Note that most local governments and utility companies require Type A-1-a or A-1-b (AASHTO classification) soils (which overall is stricter than our recommendations for structural fill) be used as backfill above utilities in certain areas. In other areas or situations, utility trenches may be backfilled with the native soil, but the contractor should be aware that native clay and silt soils (as observed in the explorations) may be time consuming to compact due to potential difficulties in controlling the moisture content needed to obtain optimum compaction. All backfill soil should have a maximum particle size of 4 inches, a maximum Liquid Limit of 35 and a maximum Plasticity Index of 15.

If required (i.e. fill in submerged areas), we recommend that free draining granular material (clean sand and/or gravel) meet the following requirements in the table below:

Table 3: Free-Draining Fill Recommendations

Sieve Size/Other	Percent Passing (by weight)
3 inches	100
No. 10	0 – 25
No. 40	0 – 15
No. 200	0 – 5
Plasticity Index	Non-plastic

Three inch minus washed rock (sometimes called river rock or drain rock) and pea gravel materials usually meet these requirements and may be used as free draining fill. If free draining



fill will be placed adjacent to soil containing a significant amount of sand or silt/clay, precautions should be taken to prevent the migration of fine soil into the free draining fill. Such precautions should include either placing a filter fabric between the free draining fill and the adjacent soil material, or using a well-graded, clean filtering material approved by the geotechnical engineer.

8.4 Fill Placement and Compaction

The thickness of each lift should be appropriate for the compaction equipment that is used. We recommend a maximum lift thickness prior to compaction of 4 inches for hand operated equipment, 6 inches for most "trench compactors" and 8 inches for larger rollers, unless it can be demonstrated by in-place density tests that the required compaction can be obtained throughout a thicker lift. The full thickness of each lift of structural fill placed should be compacted to at least the following percentages of the maximum dry density, as determined by ASTM D-1557:

- In landscape and other areas not below structurally loaded areas: 90%
- Less than 5 feet of fill below structurally loaded areas: 95%
- Greater than 5 feet of fill below structurally loaded areas: 98%

Generally, placing and compacting fill at moisture contents within ± 2 percent of the optimum moisture content, as determined by ASTM D-1557, will facilitate compaction. Typically, the further the moisture content deviates from optimum the more difficult it will be to achieve the required compaction.

Fill should be tested frequently during placement and we recommend early testing to demonstrate that placement and compaction methods are achieving the required compaction. The contractor is responsible to ensure that fill materials and compaction efforts are consistent so that tested areas are representative of the entire fill.

8.5 Stabilization Recommendations

Near surface layers of clay, silt, and silty sand soils may rut and pump during grading and construction. The likelihood of rutting and/or pumping, and the depth of disturbance, is proportional to the moisture content in the soil, the load applied to the ground surface, and the frequency of the load. Consequently, rutting and pumping can be minimized by avoiding concentrated traffic, minimizing the load applied to the ground surface by using lighter equipment, partially loaded equipment, tracked equipment, by working in dry times of the year, and/or by providing a working surface for equipment. However, because of the relatively shallow depth of groundwater, it is likely that rutting and pumping may not be avoidable.

During grading the soil in any obvious soft spots should be removed and replaced with granular material. If rutting or pumping occurs traffic should be stopped in the area of concern. The soil in rutted areas should be removed and replaced with granular material. In areas where pumping occurs the soil should either be allowed to sit until pore pressures dissipate (several hours to several days) and the soil firms up or be removed and replaced with granular material. Typically, we recommend removal to a minimum depth of 24 inches.



For granular material, we recommend using angular well-graded gravel, such as pit run, or crushed rock with a maximum particle size of four inches. We suggest that the initial lift be approximately 12 inches thick and be compacted with a static roller-type compactor. A finer granular material such as sand, gravelly sand, sandy gravel or road base may also be used. Materials which are more angular and coarse may require thinner lifts in order to achieve compaction. We recommend that the fines content (percent passing the No. 200 sieve) be less than 15%, the liquid limit be less than 35, and the plasticity index be less than 15.

Using a geosynthetic fabric, such as Mirafi 600X or equivalent, may also reduce the amount of material required and avoid mixing of the granular material and the subgrade. If a fabric is used, following removal of disturbed soils and water, the fabric should be placed over the bottom and up the sides of the excavation a minimum of 24 inches. The fabric should be placed in accordance with the manufacturer's recommendations, including proper overlaps. The granular material should then be placed over the fabric in compacted lifts. Again, we suggest that the initial lift be approximately 12 inches thick and be compacted with a static roller-type compactor.

9.0 SEISMIC AND GEOLOGIC CONSIDERATIONS

9.1 Seismic Design

The State of Utah has adopted the 2015 International Building Code (IBC) for seismic design and the structure should be designed in accordance with Chapter 16 of the IBC. The Site Class definitions in the IBC are based upon the soil properties in the upper 100 feet of the soil profile, according to Chapter 20 in ASCE 7. These properties are determined from sampler blow counts, undrained shear strength values, and/or shear velocity measurements. The code states, "When the soil properties are not known in sufficient detail to determine the site class, Site Class D shall be used unless the building official or geotechnical data determines that Site Class E or F soil is likely to be present at the site." We encountered some potentially liquefiable soil layers, but given the small amount of possible liquefaction-induced movements, we recommend using Site Class D.

The site is located at approximately 40.367 degrees latitude and -111.822 degrees longitude. Using Site Class D, the design spectral response acceleration parameters are given below.

Table 4: Design Accelerations

S_s	F_a	S_{MS}	S_{DS}
1.145 g	1.042	1.193 g	0.796 g
S₁	F_v	S_{M1}	S_{D1}
0.388 g	1.625	0.630 g	0.420 g

S_s = Mapped spectral acceleration for short periods

S₁ = Mapped spectral acceleration for 1-second period

S_{DS} = 2/3 S_{MS} = 2/3 (F_a · S_s) = 5% damped design spectral response acceleration for short periods

S_{D1} = 2/3 S_{M1} = 2/3 (F_v · S₁) = 5% damped design spectral response acceleration for 1-second period



9.2 Faulting

The subject property is located within the Intermountain Seismic Belt where the potential for active faulting and related earthquakes is present. Based upon published geologic maps³, no active faults traverse through or immediately adjacent to the site and the site is not located within local fault study zones. The nearest mapped fault trace is part of a group of fault beneath Utah Lake located about 2¼ miles southwest of the site.

9.3 Liquefaction Potential

According to current liquefaction maps⁴ for Utah County, the site is located within an area designated as "High" in liquefaction potential. Liquefaction can occur when saturated subsurface soils below groundwater lose their inter-granular strength due to an increase in soil pore water pressures during a dynamic event such as an earthquake. As part of this study, the potential for liquefaction to occur in the soils we encountered was assessed using Youd *et al*⁵ and Boulanger & Idriss⁶. Potential liquefaction-induced movements were evaluated using Tokimatsu & Seed⁷ and Youd, Hansen & Bartlett⁸.

Loose, saturated sands are most susceptible to liquefaction, but some loose, saturated gravels and relatively sensitive silt to low-plasticity silty clay soils can also liquefy during a seismic event. Subsurface soils were composed of clay, silt and sand soils. Our analysis indicates that approximately up to 1¼ inches of liquefaction-induced settlement and possibly up to ½ feet of lateral spreading could occur in the vicinity of B-1 during a moderate to large earthquake event. Given the small amount of movement, it is our opinion that liquefaction mitigation is not needed at the site.

10.0 FOUNDATIONS

10.1 General

The foundation recommendations presented in this report are based on the soil conditions encountered during our field exploration, the results of laboratory testing of samples of the native soils, the site grading recommendations presented in this report, and the foundation

³ U.S. Geological Survey, Quaternary Fault and Fold Database of the United States, November 3, 2010

⁴ Utah Geological Survey, Liquefaction-Potential Map for a Part of Utah County, Utah, Public Information Series 28, August 1994

⁵ Youd, T.L. (Chair), Idriss, I.M. (Co-Chair), and 20 other authors, 2001, Liquefaction Resistance of Soils: Summary Report from the 1996 NCEER and 1998 NCEER/NSF Workshops on Evaluation of Liquefaction Resistance of Soils, Journal of Geotechnical and Geoenvironmental Engineering, ASCE, October 2001, p. 817-833.

⁶ Boulanger, R.W. and Idriss, I.M., 2006, Liquefaction Susceptibility Criteria for Silts and Clays, Journal of Geotechnical and Geoenvironmental Engineering, ASCE, November 2006, p. 1413-1426.

⁷ Tokimatsu, K. and Seed, H.B., 1987, Evaluation of Settlements in Sands due to Earthquake Shaking, Journal of Geotechnical Engineering, ASCE, p. 861-878.

⁸ Youd, T.L., Hansen, C.M. and Bartlett, S.F., 2002, Revised Multilinear Regression Equations for Prediction of Lateral Spread Displacement, Journal of Geotechnical and Geoenvironmental Engineering, ASCE, December 2002, p. 1007-1017.



loading conditions presented in Section 3.0, *Proposed Construction*, of this report. If loading conditions and assumptions related to foundations are significantly different, Earthtec should be notified so that we can re-evaluate our design parameters and estimates (higher loads may cause more settlement), and to provide additional recommendations if necessary.

Conventional strip and spread footings may be used to support the proposed structures after appropriate removals as outlined in Section 8.1. Foundations should not be installed on topsoil, undocumented fill, debris, combination soils, organic soils, frozen soil, or in ponded water. If foundation soils become disturbed during construction, they should be removed or compacted.

10.2 Strip/Spread Footings

We recommend that conventional strip and spread foundations be constructed entirely on a minimum of 24 inches of properly placed, compacted, and tested structural fill extending to undisturbed native soils. For foundation design we recommend the following:

- Footings founded on a minimum of 24 inches of structural fill may be designed using a maximum allowable bearing capacity of 2,000 pounds per square foot. The values for vertical foundation pressure can be increased by one-third for wind and seismic conditions per Section 1806.1 when used with the Alternative Basic Load Combinations found in Section 1605.3.2 of the 2015 International Building Code.
- Continuous and spot footings should be uniformly loaded and should have a minimum width of 20 and 30 inches, respectively.
- Exterior footings should be placed below frost depth which is determined by local building codes. In general, 30 inches of cover is adequate for most sites; however local code should be verified by the end design professional. Interior footings, not subject to frost (heated structures), should extend at least 18 inches below the lowest adjacent grade.
- Foundation walls and footings should be properly reinforced to resist all vertical and lateral loads and differential settlement.
- The bottom of footing excavations should be compacted with at least 4 passes of an approved non-vibratory roller prior to erection of forms or placement of structural fill to densify soils that may have been loosened during excavation and to identify soft spots. If soft areas are encountered, they should be stabilized as recommended in Section 8.5.
- Footing excavations should be observed by the geotechnical engineer prior to beginning footing construction to evaluate whether suitable bearing soils have been exposed and whether excavation bottoms are free of loose or disturbed soils.
- Because of shallow groundwater conditions encountered at the site, we anticipate that 24 inches of structural fill will be required below the proposed structure to provide a firm surface upon which to construct the proposed structure. In lieu of traditional structural fill, clean 1- to 2-inch clean gravel may be used in conjunction with a stabilization fabric, such as Mirafi 600X or equivalent, which should be placed between the native soils and the clean gravel



(additional recommendations for placing clean gravel and stabilization fabric are given in Section 8.5 of this report).

- Due to shallow groundwater encountered at the site, lowest floor slab depths should be limited to 1 foot below existing site grades. This is intended to provide a minimum of 3 feet of separation between the observed groundwater condition and the bottom of the floor slab.
- Structural fill used below foundations should extend laterally a minimum of 6 inches for every 12 vertical inches of structural fill placed. For example, if 24 inches of structural fill is required to bring the excavation to footing grade, the structural fill should extend laterally a minimum of 12 inches beyond the edge of the footings on both sides.

10.3 Estimated Settlements

If the proposed foundations are properly designed and constructed using the parameters provided above, we estimate that total settlements should not exceed one inch and differential settlements should be one-half of the total settlement over a 25-foot length of continuous foundation, for non-earthquake conditions. Additional settlement could occur during a seismic event due to ground shaking, if more than 3 feet of grading fill is placed above the existing ground surface, if loading conditions are greater than anticipated in Section 3, and/or if foundation soils are allowed to become wetted.

10.4 Lateral Load Resistance

Lateral loads are typically resisted by friction between the underlying soil and footing bottoms. Resistance to sliding may incorporate the friction acting along the base of foundations, which may be computed using a coefficient of friction of soils against concrete of 0.55 for structural fill meeting the recommendations presented herein. The values for lateral resistance can be increased by one-third for wind and seismic conditions per Section 1806.1 when used with the Alternative Basic Load Combinations found in Section 1605.3.2 of the 2015 International Building Code.

11.0 FLOOR SLABS AND FLATWORK

Due to shallow groundwater encountered at the site, lowest floor slab depths should be limited to 1 foot below existing site grades. This is intended to provide a minimum of 3 feet of separation between the observed groundwater condition and the bottom of the floor slab.

Concrete floor slabs and exterior flatwork may be supported on undisturbed native soils after appropriate removals and grading as outlined in Section 8.1 are completed. We recommend placing a minimum 4 inches of free-draining fill material (see Section 8.3) beneath floor slabs to facilitate construction, act as a capillary break, and aid in distributing floor loads. For exterior flatwork, we recommend placing a minimum 4 inches of road-base material. Prior to placing the free-draining fill or road-base materials, the native sub-grade should be proof-rolled to identify



soft spots, which should be stabilized as discussed above in Section 8.5.

For slab design, we recommend using a modulus of sub-grade reaction of 120 pounds per cubic inch. The thickness of slabs supported directly on the ground shall not be less than 3½ inches. A 6-mil polyethylene vapor retarder with joints lapped not less than 6 inches shall be placed between the ground surface and the concrete, as per Section 1907.1 of the 2015 International Building Code.

To help control normal shrinkage and stress cracking, we recommend that floor slabs have adequate reinforcement for the anticipated floor loads with the reinforcement continuous through interior floor joints, frequent crack control joints, and non-rigid attachment of the slabs to foundation and bearing walls. Special precautions should be taken during placement and curing of all concrete slabs and flatwork. Excessive slump (high water-cement ratios) of the concrete and/or improper finishing and curing procedures used during hot or cold weather conditions may lead to excessive shrinkage, cracking, spalling, or curling of slabs. We recommend all concrete placement and curing operations be performed in accordance with American Concrete Institute (ACI) codes and practices.

12.0 DRAINAGE

12.1 Surface Drainage

As part of good construction practice, precautions should be taken during and after construction to reduce the potential for water to collect near foundation walls. Accordingly, we recommend the following:

- The contractor should take precautions to prevent significant wetting of the soil at the base of the excavation. Such precautions may include: grading to prevent runoff from entering the excavation, excavating during normally dry times of the year, covering the base of the excavation if significant rain or snow is forecast, backfill at the earliest possible date, frame floors and/or the roof at the earliest possible date, other precautions that might become evident during construction.
- Adequate compaction of foundation wall backfill should be provided i.e. a minimum of 90% of ASTM D-1557. Water consolidation methods should not be used.
- The ground surface should be graded to drain away from the building in all directions. We recommend a minimum fall of 8 inches in the first 10 feet.
- Roof runoff should be collected in rain gutters with down spouts designed to discharge well outside of the backfill limits, or at least 10 feet from foundations, whichever is greater.
- Sprinkler nozzles should be aimed away, and all sprinkler components kept at least 5 feet, from foundation walls. A drip irrigation system may be utilized in landscaping areas within 10 feet of foundation walls to minimize water intrusion at foundation backfill. Also, sprinklers



should not be placed at the top or on the face of slopes. Sprinkler systems should be designed with proper drainage and well maintained. Over-watering should be avoided.

- Any additional precautions which may become evident during construction.

12.2 Subsurface Drainage

Walls or portions thereof that retain earth and enclose interior spaces and floors below grade shall conform to Section 1805 of the 2015 International Building Code for damp proofing and water proofing.

13.0 PAVEMENT RECOMMENDATIONS

We understand that asphalt paved parking and drive areas will be constructed as part of the project. The native soils encountered beneath the topsoil during our field exploration were predominantly composed of clays. We estimate that a California Bearing Ratio (CBR) value of 3 is appropriate for these soils. If the topsoil is left beneath concrete flatwork and pavement areas, increased maintenance costs over time should be anticipated.

We anticipate that the traffic volume will be about 2,000 vehicles a day (6.1 ESAL/day) or less for the residential streets, consisting of mostly cars and pickup trucks, with a daily delivery truck and a weekly garbage truck. Based on these traffic parameters, the estimated CBR given above, and the procedures and typical design inputs outlined in the UDOT Pavement Design Manual (1998), we recommend the minimum asphalt pavement section presented below.

Table 5: Pavement Section Recommendations

Asphalt Thickness (in)	Compacted Roadbase Thickness (in)	Compacted Subbase Thickness (in)
3	6	10*
3	14*	0

* Stabilization may be required

If the pavement will be required to support construction traffic, more than an occasional semi-tractor or fire truck, or more traffic than listed above, our office should be notified so that we can re-evaluate the pavement section recommendations. The following also apply:

- The subgrade should be prepared by proof rolling to a firm, non-yielding surface, with any identified soft areas stabilized as discussed above in Section 8.5.
- Site grading fills below the pavements should meet structural fill composition and placement recommendations per Sections 8.3 and 8.4 herein.
- Asphaltic concrete, aggregate base and sub-base material composition should meet local, APWA or UDOT requirements.
- Aggregate base and sub-base is compacted to local, APWA, or UDOT requirements, or to at



least 95 percent of maximum dry density (ASTM D 1557).

- Asphaltic concrete is compacted to local or UDOT requirements, or to at least 96 percent of the laboratory Marshall density (ASTM D 6927).

Due to high static loads imposed by at dumpster locations, we recommend that a rigid pavement section for this area of a minimum of six (6) inches of Portland Cement Concrete (PCC) over a minimum of twelve (12) inches of aggregate base material. The aggregate base material should meet local, APWA or UDOT requirements and should be compacted to local, APWA, or UDOT requirements, or to at least 95 percent of maximum dry density (ASTM D1557).

14.0 GENERAL CONDITIONS

The exploratory data presented in this report was collected to provide geotechnical design recommendations for this project. The explorations may not be indicative of subsurface conditions outside the study area or between points explored and thus have a limited value in depicting subsurface conditions for contractor bidding. Variations from the conditions portrayed in the explorations may occur and which may be sufficient to require modifications in the design. If during construction, conditions are different than presented in this report, Earthtec should be advised immediately so that the appropriate modifications can be made.

The findings and recommendations presented in this geotechnical report were prepared in accordance with generally accepted geotechnical engineering principles and practice in this area of Utah at this time. No warranty or representation is intended in our proposals, contracts, letters, or reports.

This geotechnical report is based on relatively limited subsurface explorations and laboratory testing. Subsurface conditions may differ in some locations of the site from those described herein, which may require additional analyses and possibly modified recommendations. Thus, we strongly recommend consulting with Earthtec regarding any changes made during design and construction of the project from those discussed herein. Failure to consult with Earthtec regarding any such changes relieves Earthtec from any liability arising from changed conditions at the site.

To maintain continuity, Earthtec should also perform materials testing and special inspections for this project. The recommendations presented herein are based on the assumption that an adequate program of tests and observations will be followed during construction to verify compliance with our recommendations. We also assume that we will review the project plans and specifications to verify that our conclusions and recommendations are incorporated and remain appropriate (based on the actual design). Earthtec should be retained to review the final design plans and specifications so comments can be made regarding interpretation and implementation of our geotechnical recommendations in the design and specifications. Earthtec also should be retained to provide observation and testing services during grading, excavation,



Geotechnical Study
900 West Townhomes
Approximately 400 South 900 West
American Fork, Utah
Project No.: 188944

foundation construction, and other earth-related construction phases of the project.


We appreciate the opportunity of providing our services on this project. If we can answer questions or be of further service, please contact Earthtec at your convenience.

Respectfully;

EARTHTEC ENGINEERING



Jeremy A. Balleck, E.I.T.
Staff Engineer



Timothy A. Mitchell, P.E.
Senior Geotechnical Engineer





VICINITY MAP

900 WEST TOWNHOMES

APPROXIMATELY 400 SOUTH 900 WEST

AMERICAN FORK, UTAH

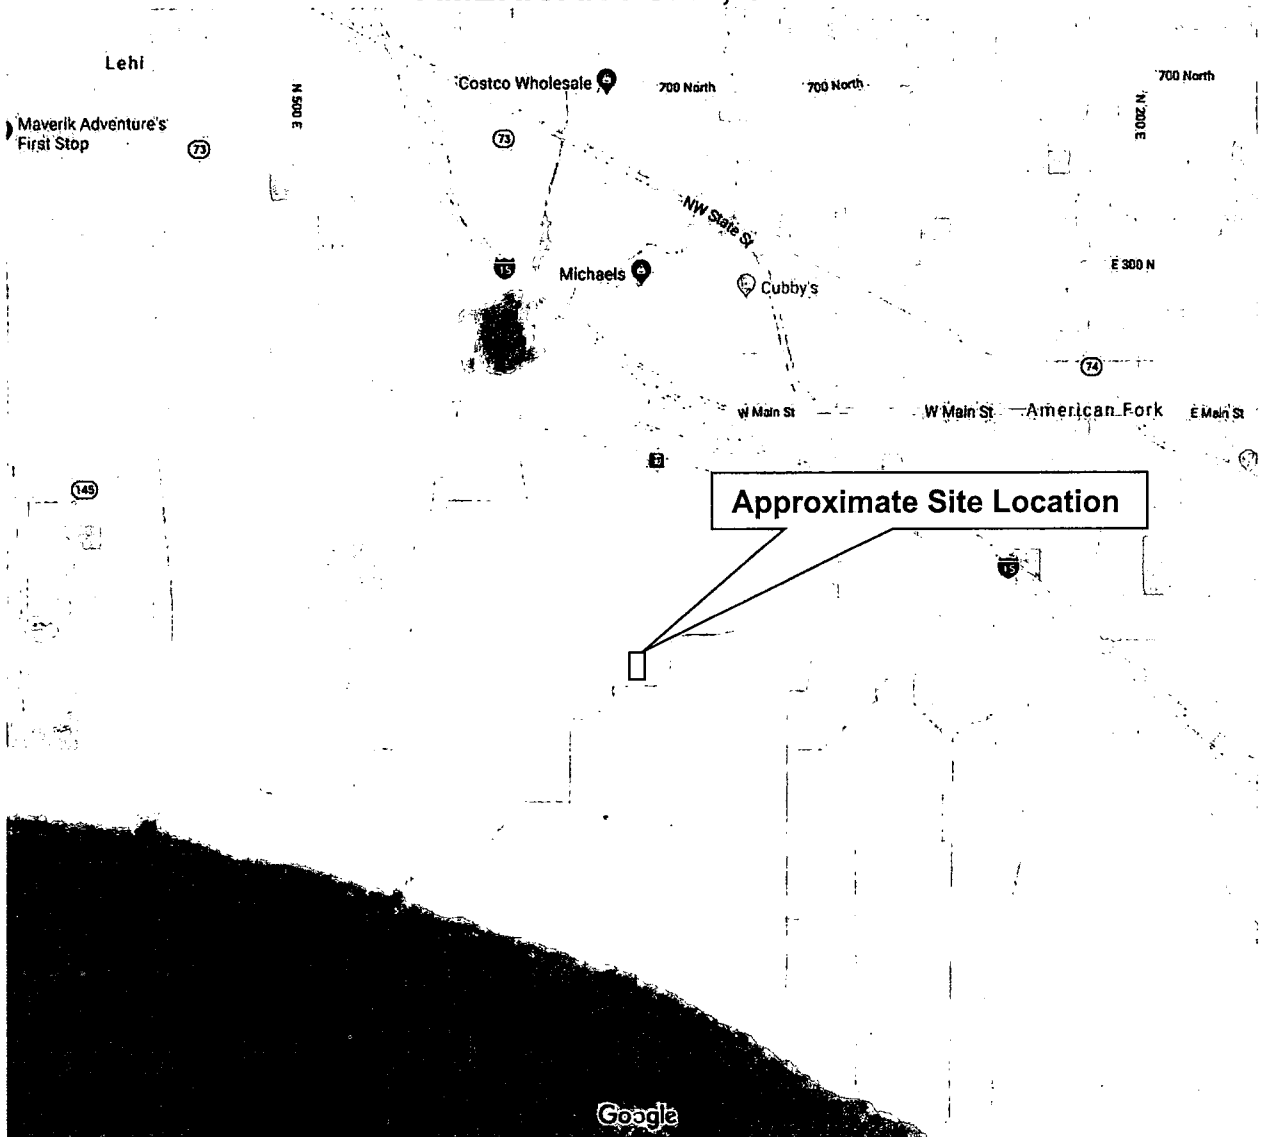

Not to Scale


PROJECT NO.: 188944




FIGURE NO.: 1

AERIAL PHOTOGRAPH SHOWING LOCATION OF BORING AND TEST PITS

900 WEST TOWNHOMES
APPROXIMATELY 400 SOUTH 900 WEST
AMERICAN FORK, UTAH

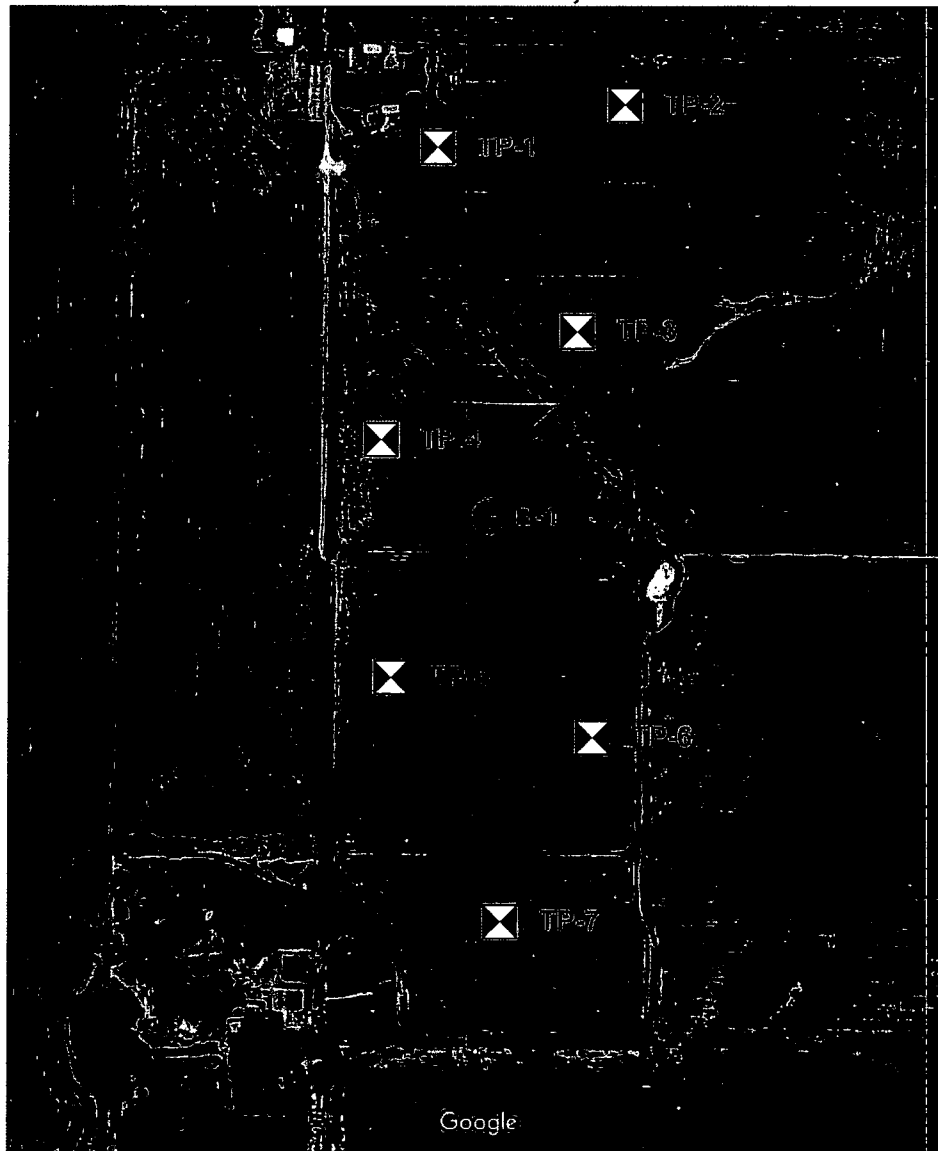

-  Approximate Boring Location
-  Approximate Test Pit Locations



Not to Scale

PROJECT NO.: 188944



FIGURE NO.: 2

BORING LOG

NO.: B-1

PROJECT: 900 West Townhomes
CLIENT: Ascent Development Group, LLC
LOCATION: See Figure 2
OPERATOR: Great Basin
EQUIPMENT: ATV Drill Rig
DEPTH TO WATER; INITIAL ∇ :

PROJECT NO.: 188944
DATE: 09/11/18
ELEVATION: Not Measured
LOGGED BY: C. Allred

AT COMPLETION ∇ : 5 ft.

Depth (Ft.)	Graphic Log	USCS	Description	Samples	TEST RESULTS									
					Blows per foot	Water Cont. (%)	Dry Dens. (pcf)	LL	PI	Gravel (%)	Sand (%)	Fines (%)	Other Tests	
0			TOPSOIL, silty clay, dry, brown, organics											
3			Lean CLAY with sand, soft to stiff, moist to wet, gray to brown	5										SS
6						22	98	31	8	6	12	82		C
9		CL		3										
12				9										
15			Silty CLAY with sand, soft to stiff, wet, gray	4	19		24	7	1	23	76			
18														
21		CL-ML		12										
24														
27			SILT, medium stiff to stiff, wet, gray	8			18	NP						
30		ML												
33			Maximum depth explored approximately 31½ feet	9										

Notes: Groundwater encountered at approximately 5 feet

Tests Key

- CBR = California Bearing Ratio
- C = Consolidation
- R = Resistivity/Nitrates/PH
- DS = Direct Shear
- SS = Soluble Sulfates
- UC = Unconfined Compressive Strength

LOG OF TESTHOLE 188944 LOGS.GPJ EARTHTEC.GDT 10/2/18

PROJECT NO.: 188944



FIGURE NO.: 3

TEST PIT LOG

NO.: TP-1

PROJECT: 900 West Townhomes
CLIENT: Ascent Development Group, LLC
LOCATION: See Figure 2
OPERATOR: JSI Excavation
EQUIPMENT: Mini Excavator
DEPTH TO WATER; INITIAL ∇ :

PROJECT NO.: 188944
DATE: 09/12/18
ELEVATION: Not Measured
LOGGED BY: J. Balleck

AT COMPLETION ∇ : 4 ft.

Depth (Ft.)	Graphic Log	USCS	Description	Samples	TEST RESULTS								
					Water Cont. (%)	Dry Dens. (pcf)	LL	PI	Gravel (%)	Sand (%)	Fines (%)	Other Tests	
0			TOPSOIL, silty clay, dry, brown										
1			Lean CLAY, soft to medium stiff (estimated), dry to wet, gray to brown, roots to 4'										
2													
3													
4						26	93	36	18	0	7	93	C
5													
6		CL											
7			... some gravel	X									
8													
9													
10													
11													
12			Maximum depth explored approximately 11 feet										
13													
14													
15													

Notes: Groundwater encountered at approximately 4 feet

Tests Key

- CBR = California Bearing Ratio
- C = Consolidation
- R = Resistivity
- DS = Direct Shear
- SS = Soluble Sulfates
- B = Burnoff

PROJECT NO.: 188944



FIGURE NO.: 4

LOG OF TESTPIT 188944 LOGS.GPJ EARTHTEC.GDT 10/2/18

TEST PIT LOG

NO.: TP-2

PROJECT: 900 West Townhomes
CLIENT: Ascent Development Group, LLC
LOCATION: See Figure 2
OPERATOR: JSI Excavation
EQUIPMENT: Mini Excavator
DEPTH TO WATER; INITIAL ∇ :

PROJECT NO.: 188944
DATE: 09/12/18
ELEVATION: Not Measured
LOGGED BY: J. Balleck

AT COMPLETION ∇ : 6 ft.

Depth (Ft.)	Graphic Log	USCS	Description	Samples	TEST RESULTS																	
					Water Cont. (%)	Dry Dens. (pcf)	LL	PI	Gravel (%)	Sand (%)	Fines (%)	Other Tests										
0																						
1			TOPSOIL, silty clay, dry, brown																			
2		CL ∇	Lean CLAY, soft to medium stiff (estimated), dry to wet, gray to brown, roots to 4' ... some gravel																			
3																						
4																						
5																						
6										32	11											
7																						
8																						
9																						
10																						
11						Maximum depth explored approximately 11 feet																
12																						
13																						
14																						
15																						

LOG OF TESTPIT 188944 LOGS.GPJ EARTHTEC.GDT 10/2/18

Notes: Groundwater encountered at approximately 6 feet

Tests Key
 CBR = California Bearing Ratio
 C = Consolidation
 R = Resistivity
 DS = Direct Shear
 SS = Soluble Sulfates
 B = Burnoff

PROJECT NO.: 188944



FIGURE NO.: 5

TEST PIT LOG

NO.: TP-3

PROJECT: 900 West Townhomes
CLIENT: Ascent Development Group, LLC
LOCATION: See Figure 2
OPERATOR: JSI Excavation
EQUIPMENT: Mini Excavator
DEPTH TO WATER; INITIAL ∇ :

PROJECT NO.: 188944
DATE: 09/12/18
ELEVATION: Not Measured
LOGGED BY: J. Balleck

AT COMPLETION ∇ : 6 ft.

Depth (Ft.)	Graphic Log	USCS	Description	Samples	TEST RESULTS								
					Water Cont. (%)	Dry Dens. (pcf)	LL	PI	Gravel (%)	Sand (%)	Fines (%)	Other Tests	
0			TOPSOIL, silty clay, dry, brown										
1			Silty SAND, medium dense (estimated), dry, gray, roots										
2		SM											
3			Lean CLAY, soft to medium stiff (estimated), moist to wet, brown										
4		CL			24	95	38	19	1	11	88	C	
5													
6			∇										
7		CL	Sandy Lean CLAY, soft (estimated), wet, light brown										
8													
9		CL	Lean CLAY, soft to medium stiff (estimated), wet, black to gray, calcified nodules, roots										
10													
11			Maximum depth explored approximately 10½ feet										
12													
13													
14													
15													

Notes: Groundwater encountered at approximately 6 feet

Tests Key

- CBR = California Bearing Ratio
- C = Consolidation
- R = Resistivity
- DS = Direct Shear
- SS = Soluble Sulfates
- B = Burnoff

PROJECT NO.: 188944



FIGURE NO.: 6

LOG OF TESTPIT 188944 LOGS.GPJ EARTHTEC.GDT 10/2/18

TEST PIT LOG

NO.: TP-4

PROJECT: 900 West Townhomes
CLIENT: Ascent Development Group, LLC
LOCATION: See Figure 2
OPERATOR: JSI Excavation
EQUIPMENT: Mini Excavator
DEPTH TO WATER; INITIAL ∇ :

PROJECT NO.: 188944
DATE: 09/12/18
ELEVATION: Not Measured
LOGGED BY: J. Balleck

AT COMPLETION ∇ : 11 ft.

Depth (Ft.)	Graphic Log	USCS	Description	Samples	TEST RESULTS																
					Water Cont. (%)	Dry Dens. (pcf)	LL	PI	Gravel (%)	Sand (%)	Fines (%)	Other Tests									
0																					
1			TOPSOIL, silty clay, dry, brown																		
2		CL	Sandy Lean CLAY, soft (estimated), moist to wet, brown ... calcified nodules																		
3																					
4																					
5																					
6																					
7																					
8											39	17									
9																					
10																					
11																					
			Maximum depth explored approximately 11 feet																		
12																					
13																					
14																					
15																					

Notes: Groundwater encountered at approximately 11 feet

Tests Key

- CBR = California Bearing Ratio
- C = Consolidation
- R = Resistivity
- DS = Direct Shear
- SS = Soluble Sulfates
- B = Burnoff

PROJECT NO.: 188944



FIGURE NO.: 7











LOG OF TESTPIT 188944 LOGS.GPJ EARTHTEC.GDT 10/2/18

TEST PIT LOG

NO.: TP-5

PROJECT: 900 West Townhomes
CLIENT: Ascent Development Group, LLC
LOCATION: See Figure 2
OPERATOR: JSI Excavation
EQUIPMENT: Mini Excavator
DEPTH TO WATER; INITIAL ∇ :

PROJECT NO.: 188944
DATE: 09/12/18
ELEVATION: Not Measured
LOGGED BY: J. Balleck
AT COMPLETION ∇ : 8 ft.

Depth (Ft.)	Graphic Log	USCS	Description	Samples	TEST RESULTS									
					Water Cont. (%)	Dry Dens. (pcf)	LL	PI	Gravel (%)	Sand (%)	Fines (%)	Other Tests		
0			TOPSOIL, silty clay, dry, brown											
1			Lean CLAY, soft to medium stiff (estimated), dry to wet, gray to brown, roots to 3½' CL ... calcified nodules, some roots											
2														
3					9	97	36	15	1	13	86	C		
4														
5														
6														
7														
8														
9														
10														
11				Maximum depth explored approximately 10½ feet										
12														
13														
14														
15														

Notes: Groundwater encountered at approximately 8 feet

Tests Key

- CBR = California Bearing Ratio
- C = Consolidation
- R = Resistivity
- DS = Direct Shear
- SS = Soluble Sulfates
- B = Burnoff

LOG OF TESTPIT 188944 LOGS.GPJ EARTHTEC.GDT 10/2/18

PROJECT NO.: 188944



FIGURE NO.: 8

TEST PIT LOG

NO.: TP-6

PROJECT: 900 West Townhomes
CLIENT: Ascent Development Group, LLC
LOCATION: See Figure 2
OPERATOR: JSI Excavation
EQUIPMENT: Mini Excavator
DEPTH TO WATER; INITIAL ∇ :

PROJECT NO.: 188944
DATE: 09/12/18
ELEVATION: Not Measured
LOGGED BY: J. Balleck
AT COMPLETION ∇ : 12 ft.

Depth (Ft.)	Graphic Log	USCS	Description	Samples	TEST RESULTS								
					Water Cont. (%)	Dry Dens. (pcf)	LL	PI	Gravel (%)	Sand (%)	Fines (%)	Other Tests	
0			TOPSOIL, silty clay, dry, brown										
1			Silty CLAY, medium stiff (estimated), dry, brown										
2		CL-ML											
3			Sandy SILT, medium stiff (estimated), dry to moist, tan, roots	X									
4		ML											
5			Silty SAND, medium dense (estimated), moist, brown	X									
6		SM											
7			Lean CLAY, medium stiff to soft (estimated), moist, red-brown, mottled										
8													
9			... wet, gray, calcified nodules, roots										
10		CL											
11				X									
12			Maximum depth explored approximately 12 feet										
13													
14													
15													

Notes: Groundwater encountered at approximately 12 feet

Tests Key

- CBR = California Bearing Ratio
- C = Consolidation
- R = Resistivity
- DS = Direct Shear
- SS = Soluble Sulfates
- B = Burnoff

LOG OF TESTPIT 188944 LOGS.GPJ EARTHTEC.GDT 10/2/18

PROJECT NO.: 188944



FIGURE NO.: 9

TEST PIT LOG

NO.: TP-7

PROJECT: 900 West Townhomes
CLIENT: Ascent Development Group, LLC
LOCATION: See Figure 2
OPERATOR: JSI Excavation
EQUIPMENT: Mini Excavator
DEPTH TO WATER; INITIAL ∇ :

PROJECT NO.: 188944
DATE: 09/12/18
ELEVATION: Not Measured
LOGGED BY: J. Balleck
AT COMPLETION ∇ : 12 ft.

Depth (Ft.)	Graphic Log	USCS	Description	Samples	TEST RESULTS													
					Water Cont. (%)	Dry Dens. (pcf)	LL	PI	Gravel (%)	Sand (%)	Fines (%)	Other Tests						
0																		
1			TOPSOIL, silty clay, dry, brown															
2		CL-ML	Sandy Silty CLAY, medium stiff (estimated), dry, brown, roots															
3			... oxide stains															
4						18		25	6	2	28	70						
5																		
6																		
7			... moist, mottled, oxide stains, roots															
8																		
9																		
10		CL	Lean CLAY, medium stiff to stiff (estimated), moist to wet, gray, roots															
11																		
12			∇															
13			Maximum depth explored approximately 12½ feet															
14																		
15																		

LOG OF TESTPIT 188944 LOGS.GPJ EARTHTEC.GDT 10/2/18

Notes: Groundwater encountered at approximately 12 feet

- Tests Key**
- CBR = California Bearing Ratio
 - C = Consolidation
 - R = Resistivity
 - DS = Direct Shear
 - SS = Soluble Sulfates
 - B = Burnoff

PROJECT NO.: 188944



FIGURE NO.: 10

LEGEND

PROJECT: 900 West Townhomes
CLIENT: Ascent Development Group, LLC

DATE: 09/11/18 - 09/12/18
LOGGED BY: J. Balleck

UNIFIED SOIL CLASSIFICATION SYSTEM

MAJOR SOIL DIVISIONS		USCS		TYPICAL SOIL DESCRIPTIONS		
COARSE GRAINED SOILS (More than 50% retaining on No. 200 Sieve)	GRAVELS (More than 50% of coarse fraction retained on No. 4 Sieve)	CLEAN GRAVELS (Less than 5% fines)		GW	Well Graded Gravel, May Contain Sand, Very Little Fines	
		GRAVELS WITH FINES (More than 12% fines)		GP	Poorly Graded Gravel, May Contain Sand, Very Little Fines	
		SANDS (50% or more of coarse fraction passes No. 4 Sieve)	CLEAN SANDS (Less than 5% fines)		SW	Well Graded Sand, May Contain Gravel, Very Little Fines
			SANDS WITH FINES (More than 12% fines)		SP	Poorly Graded Sand, May Contain Gravel, Very Little Fines
	FINE GRAINED SOILS (More than 50% passing No. 200 Sieve)	SILTS AND CLAYS (Liquid Limit less than 50)		SM	Silty Sand, May Contain Gravel	
				SC	Clayey Sand, May Contain Gravel	
				CL	Lean Clay, Inorganic, May Contain Gravel and/or Sand	
		SILTS AND CLAYS (Liquid Limit Greater than 50)		ML	Silt, Inorganic, May Contain Gravel and/or Sand	
			OL	Organic Silt or Clay, May Contain Gravel and/or Sand		
			CH	Fat Clay, Inorganic, May Contain Gravel and/or Sand		
			MH	Elastic Silt, Inorganic, May Contain Gravel and/or Sand		
			OH	Organic Clay or Silt, May Contain Gravel and/or Sand		
HIGHLY ORGANIC SOILS			PT	Peat, Primarily Organic Matter		

SAMPLER DESCRIPTIONS

- SPLIT SPOON SAMPLER
(1 3/8 inch inside diameter)
- MODIFIED CALIFORNIA SAMPLER
(2 inch outside diameter)
- SHELBY TUBE
(3 inch outside diameter)
- BLOCK SAMPLE
- BAG/BULK SAMPLE

WATER SYMBOLS

- Water level encountered during field exploration
- Water level encountered at completion of field exploration

- NOTES:**
1. The logs are subject to the limitations, conclusions, and recommendations in this report.
 2. Results of tests conducted on samples recovered are reported on the logs and any applicable graphs.
 3. Strata lines on the logs represent approximate boundaries only. Actual transitions may be gradual.
 4. In general, USCS symbols shown on the logs are based on visual methods only; actual designations (based on laboratory tests) may vary.


LEGEND 188944 LOGS.GPJ EARTHTEC.GDT 10/2/18

PROJECT NO.: 188944



FIGURE NO.: 11


CONSOLIDATION - SWELL TEST

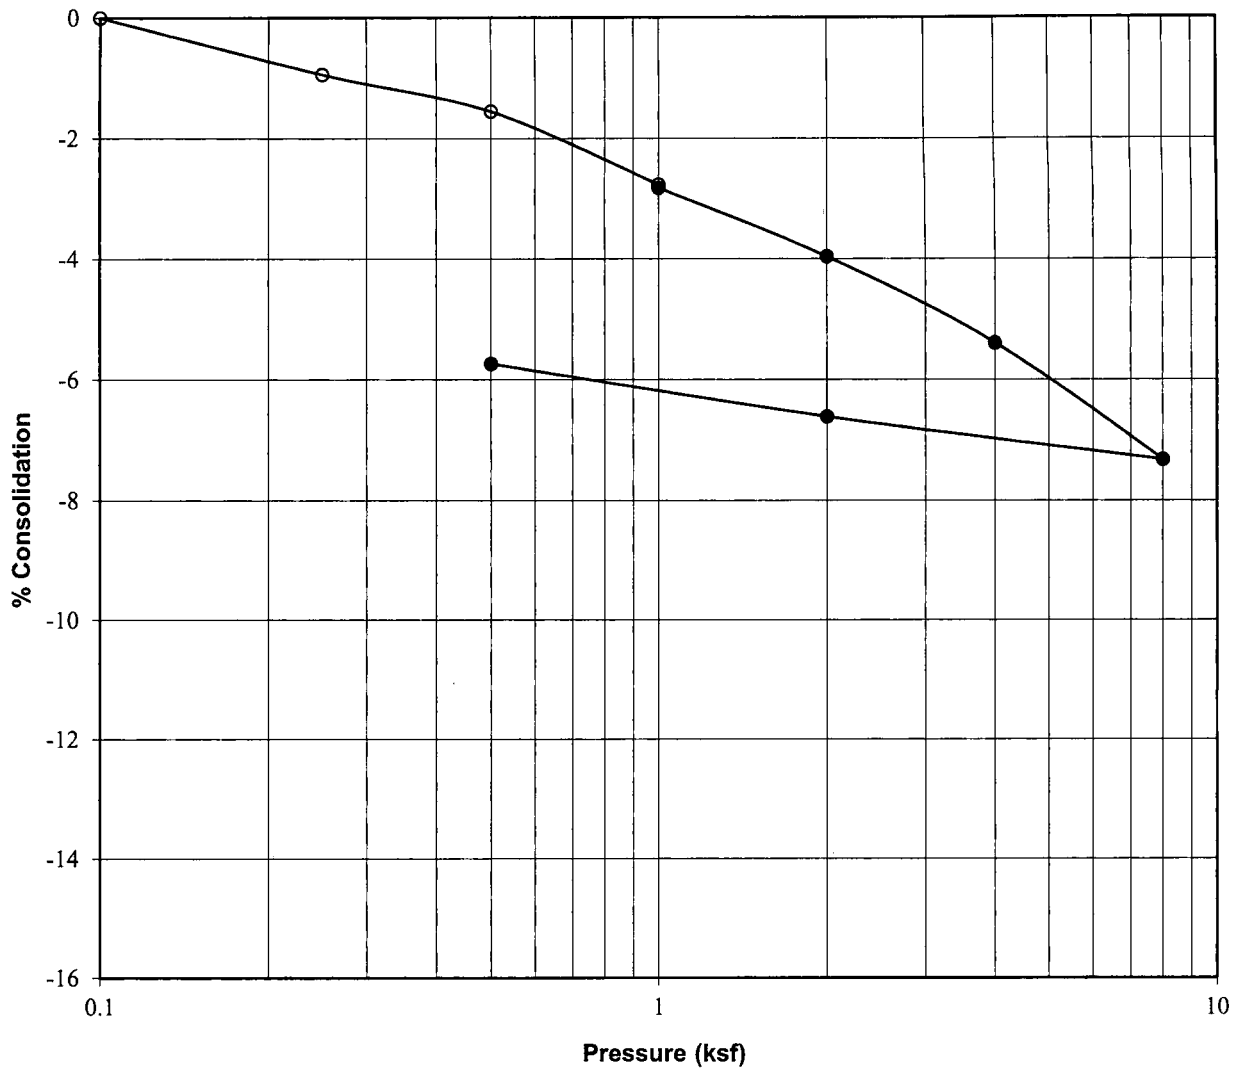

Project:	900 West Townhomes
Location:	B-1
Sample Depth, ft:	5
Description:	Shelby
Soil Type:	Lean CLAY (CL) with sand
Natural Moisture, %:	22
Dry Density, pcf:	98
Liquid Limit:	31
Plasticity Index:	8
Water Added at:	1 ksf
Percent Collapse:	0.1



CONSOLIDATION - SWELL TEST

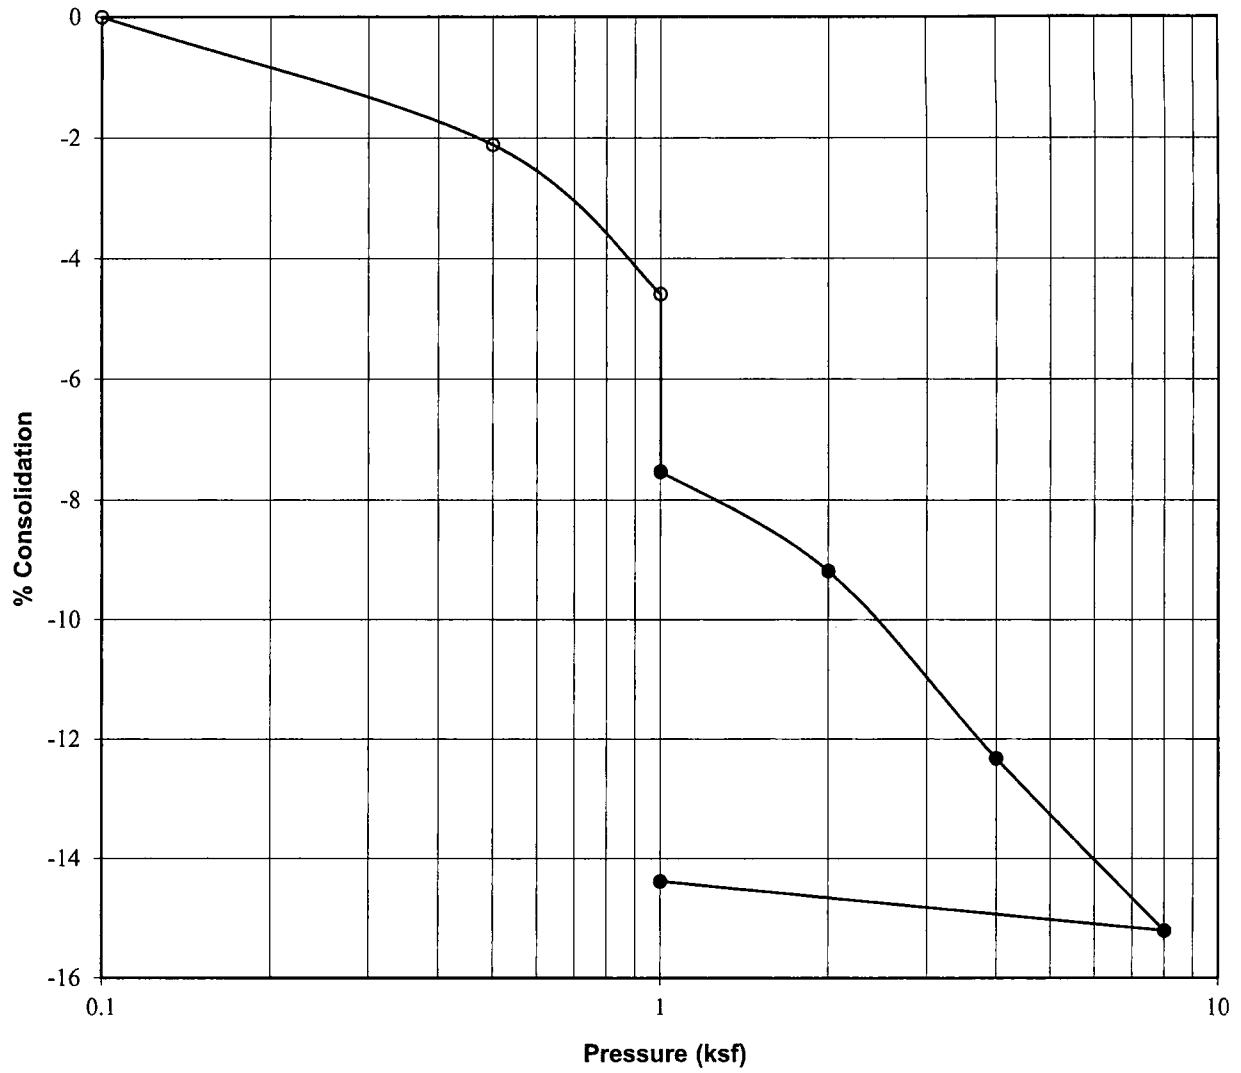


Project:	900 West Townhomes
Location:	TP-1
Sample Depth, ft:	3½
Description:	Block
Soil Type:	Lean CLAY (CL)
Natural Moisture, %:	26
Dry Density, pcf:	93
Liquid Limit:	36
Plasticity Index:	18
Water Added at:	1 ksf
Percent Collapse:	2.9

PROJECT NO.: 188944



FIGURE NO.: 13


CONSOLIDATION - SWELL TEST

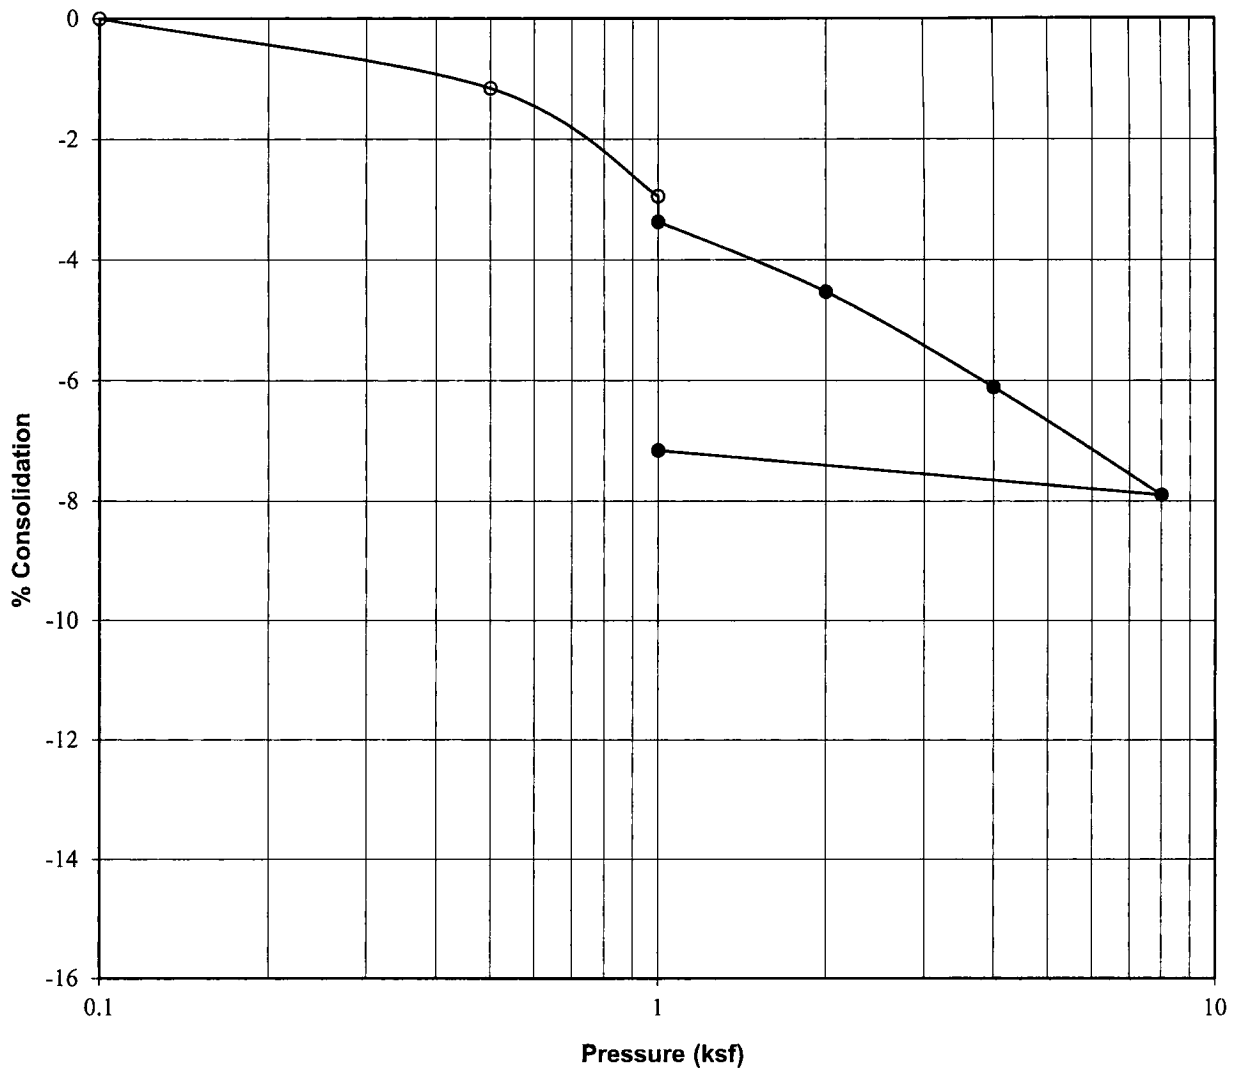

Project:	900 West Townhomes
Location:	TP-3
Sample Depth, ft:	4
Description:	Block
Soil Type:	Lean CLAY (CL)
Natural Moisture, %:	24
Dry Density, pcf:	95
Liquid Limit:	38
Plasticity Index:	19
Water Added at:	1 ksf
Percent Collapse:	0.4




CONSOLIDATION - SWELL TEST

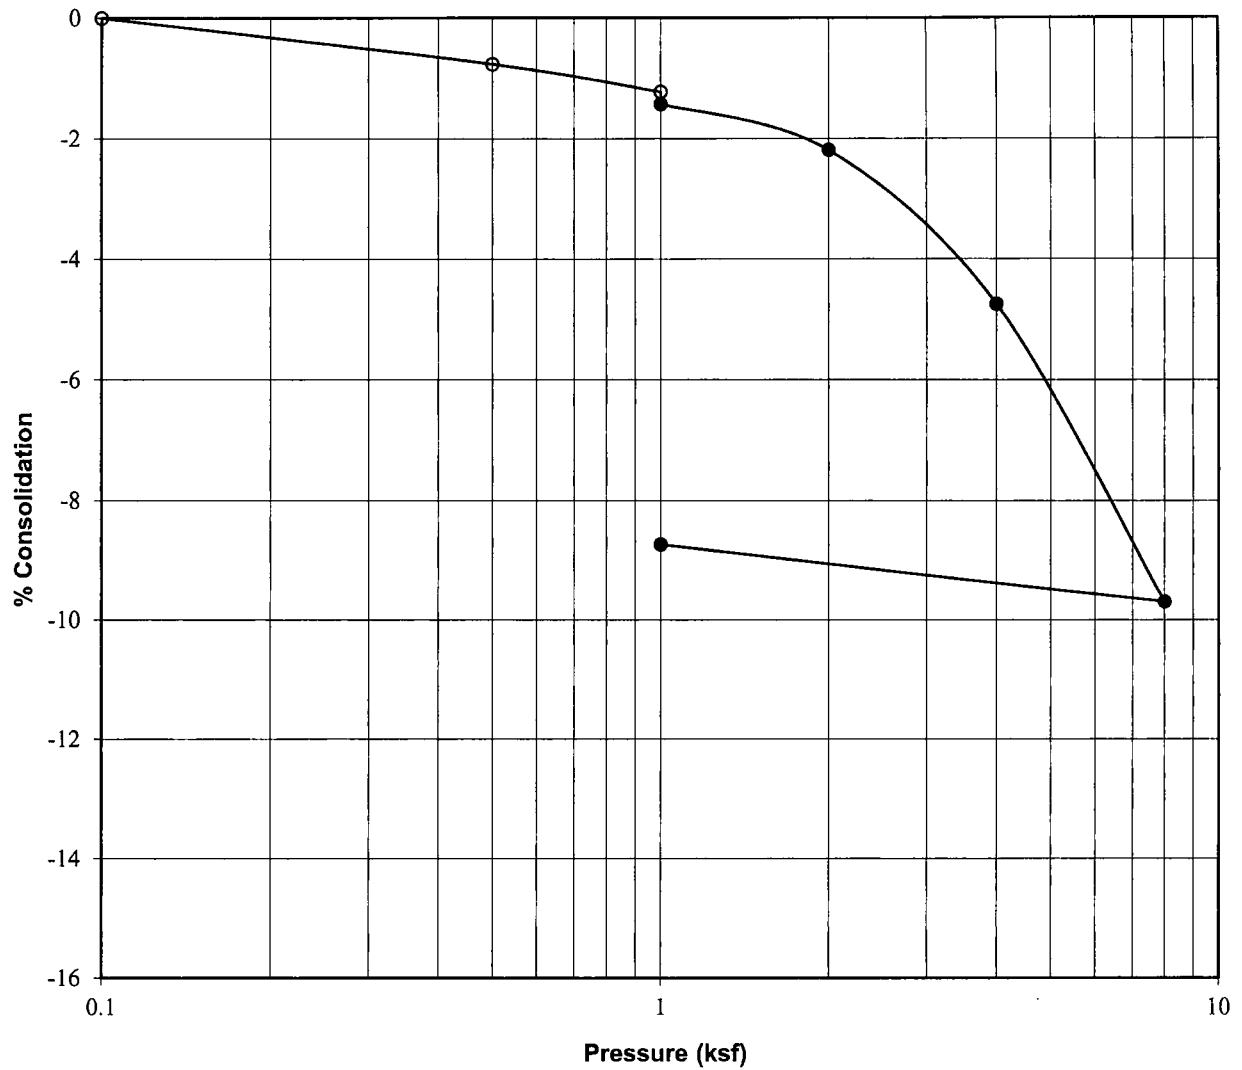

Project:	900 West Townhomes
Location:	TP-5
Sample Depth, ft:	2½
Description:	Block
Soil Type:	Lean CLAY (CL)
Natural Moisture, %:	9
Dry Density, pcf:	97
Liquid Limit:	36
Plasticity Index:	15
Water Added at:	1 ksf
Percent Collapse:	0.2



CONSOLIDATION - SWELL TEST

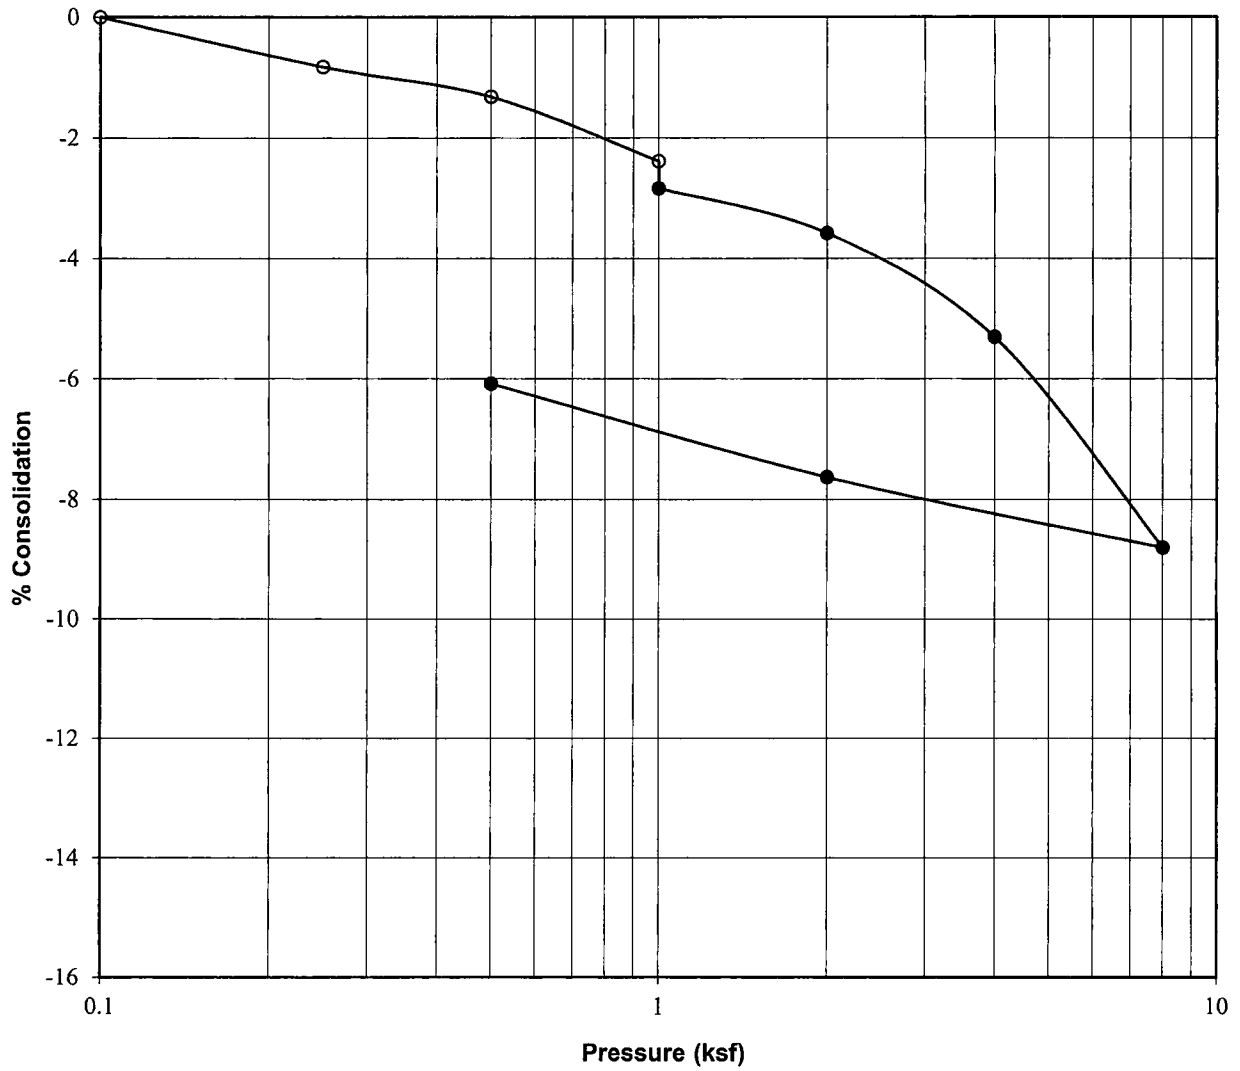

Project:	900 West Townhomes
Location:	TP-6
Sample Depth, ft:	7½
Description:	Block
Soil Type:	Lean CLAY (CL)
Natural Moisture, %:	29
Dry Density, pcf:	91
Liquid Limit:	42
Plasticity Index:	20
Water Added at:	1 ksf
Percent Collapse:	0.4



APPENDIX A



Timpview Analytical Laboratories

A Chemtech-Ford, Inc. Affiliate
 1384 West 130 South Orem, UT 84058 (801) 229-2282



Certificate of Analysis

Earthtec Testing & Engineering
 Caleb Allred
 1497 W 40 S
 Lindon, UT 84042
 DW System # :

Work Order #: 1810784
 PO# / Project Name: 188944
 Receipt: 9/13/18 14:35
 Batch Temp °C: 32.9
 Date Reported: 9/20/2018

Sample Name: 188944 B-1 @ 2.5

Collected: 9/12/18 0:00

Matrix: Solid

Collected By: Client

Parameter	Lab ID #	Method	Analysis		Units	MRL	Flags
			Date / Time	Result			
Sulfate, Soluble (IC)	1810784-01	EPA 300.0	9/19/18	47	mg/kg dry	12	
Total Solids	1810784-01	SM 2540G	9/19/18	80.4	%	0.1	

Comment:


Reviewed by:

Joyce Applegate

 Joyce Applegate, Project Manager




Analyses presented in this report were performed in accordance with the National Environmental Laboratory Accreditation Program by a Chemtech-Ford affiliate company, except where otherwise noted.

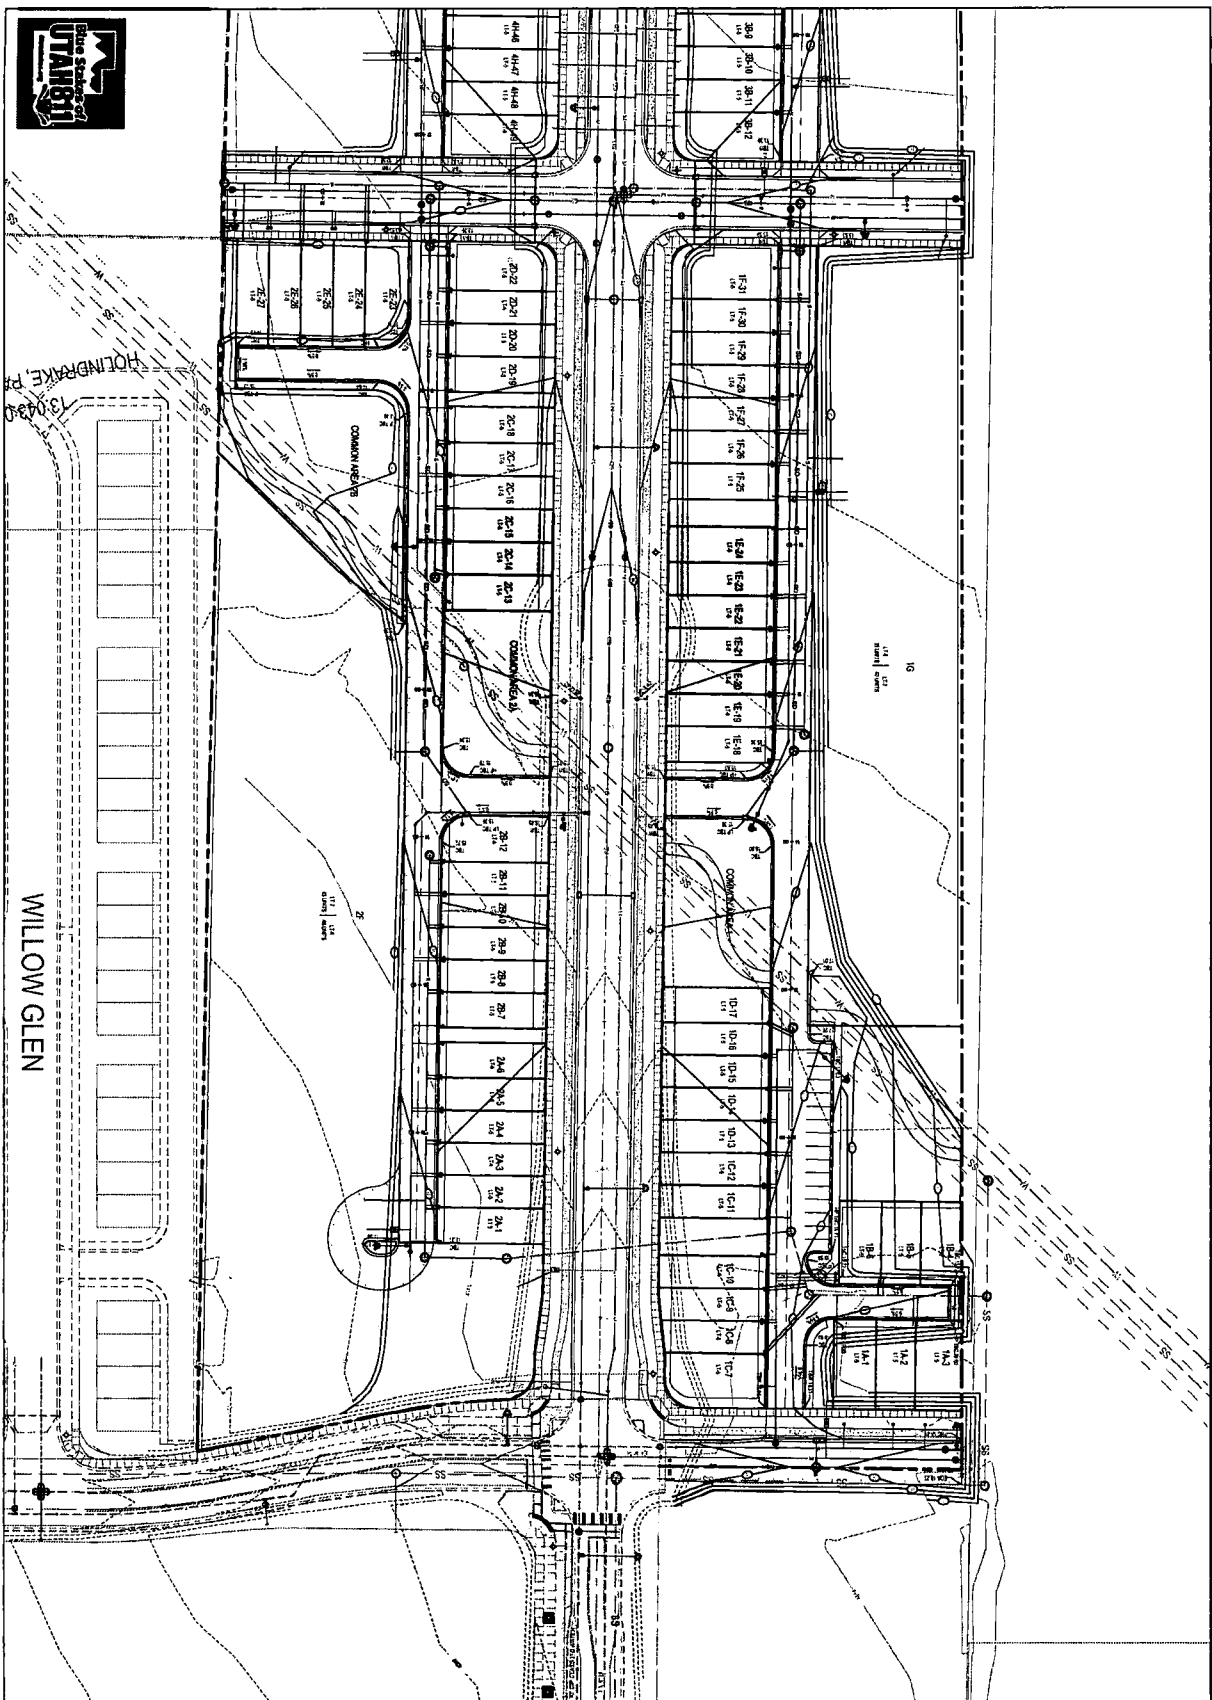
Exhibit C







HOLMSPRKE PL
13-0430


WILLOW GLEN

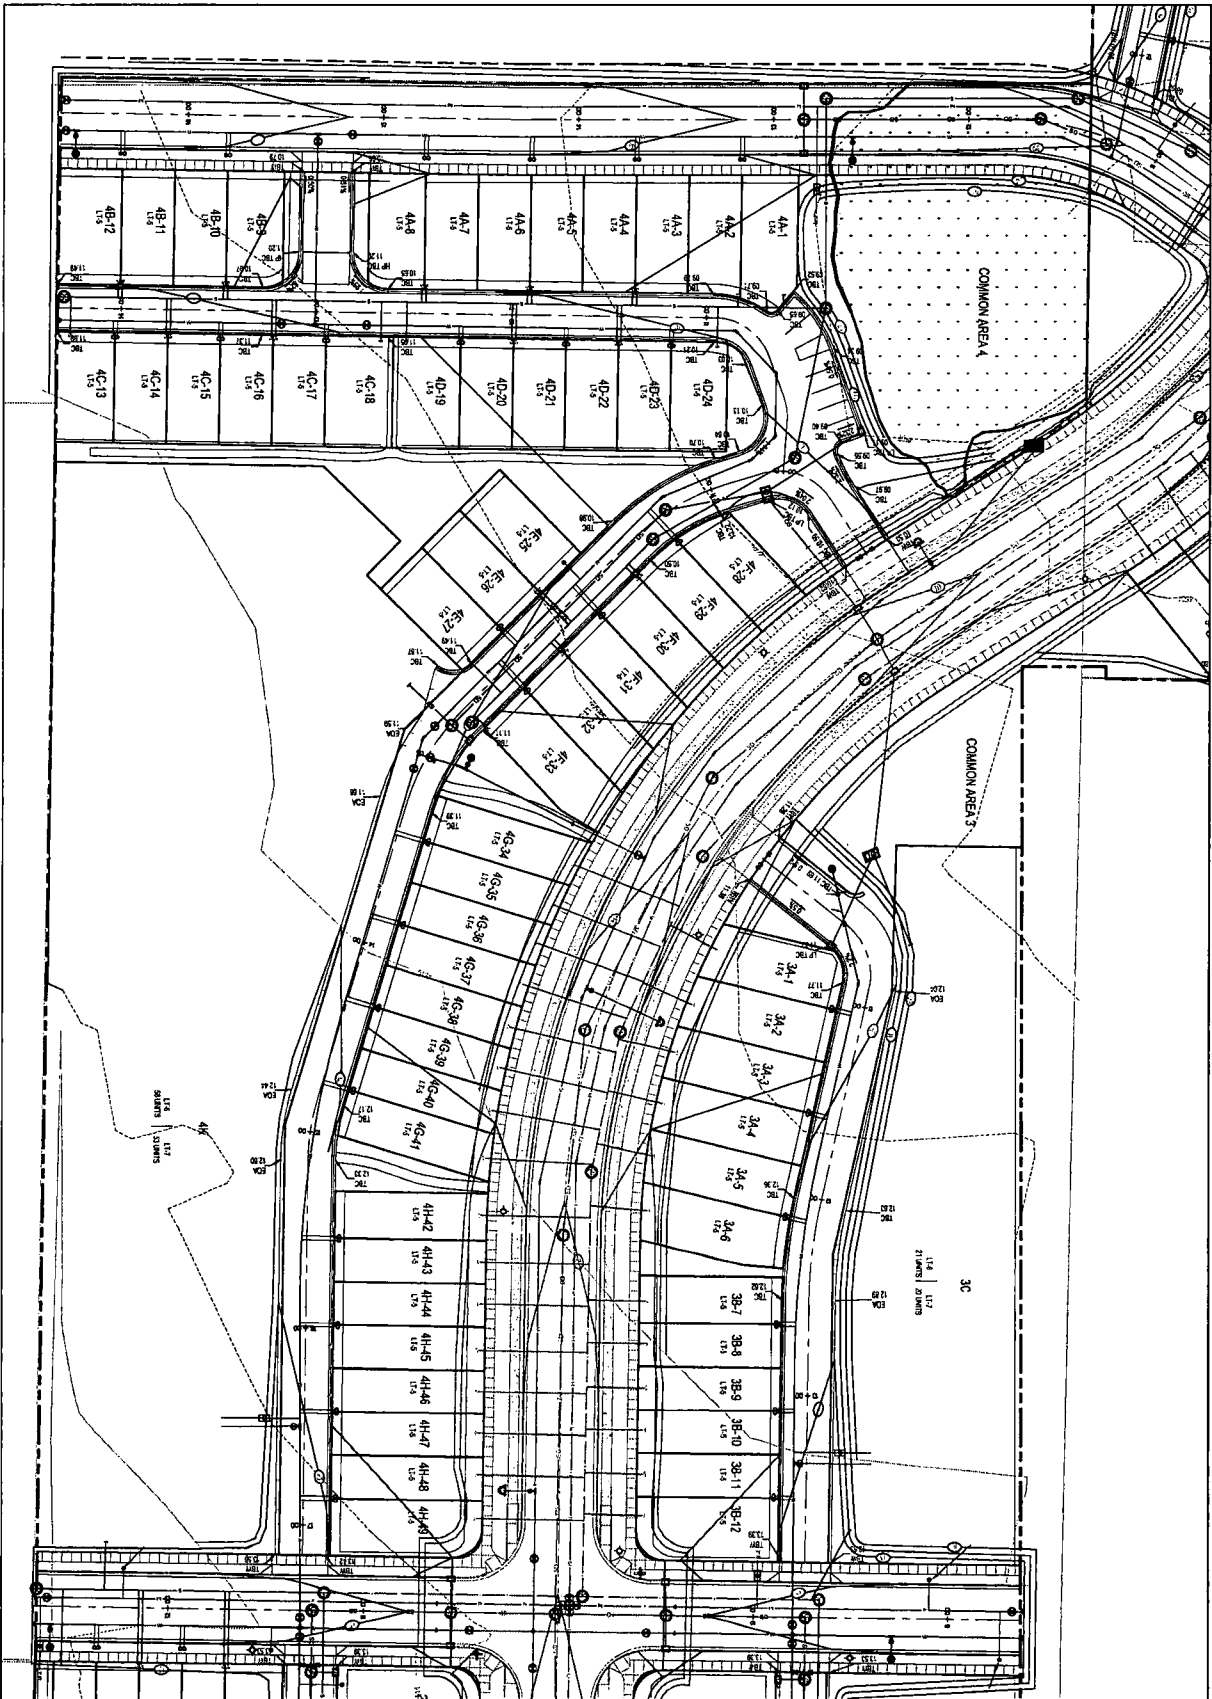 <p>ARDERO 500 South 850 East Salt Lake City, UT 84143 (801) 487-6337</p>		<p>LAKESHORE LANDING</p>		<p>SCALE: 1" = 40'</p> 	
<p>Beng CIVIL ENGINEERING 1100 N. University Ave., Suite 400 Salt Lake City, UT 84143 (801) 487-1177 www.benginc.com</p>				<p>FINAL BLOCK PLAN</p>	
<p>DATE: 07/20/21 PROJECT: C3.1</p>		<p>SCALE: 1" = 40'</p>		<p>SECTION: GRADING PLAN</p>	
<p>DATE: 07/20/21</p>		<p>SCALE: 1" = 40'</p>		<p>SECTION: C3.1</p>	



<p>570 South 650 East Suite A1 Lehi, UT 84043 (888) 484-4337</p>	 ARDERO	<p>LAKE SHORE LANDING</p>	 SCALE: 1" = 30'	 CIVIL ENGINEERING 11020 N. Redwood Rd., Suite 200 Lehi, UT 84043 (801) 884-1177 (801) 884-1177		<p>FINAL BLOCK PLAN</p>	<p>SECTION: C3.1</p>	<p>GRADING PLAN</p>
--	--	--------------------------------------	--	--	---	--	----------------------	-------------------------

CKWATER
3-040-0035

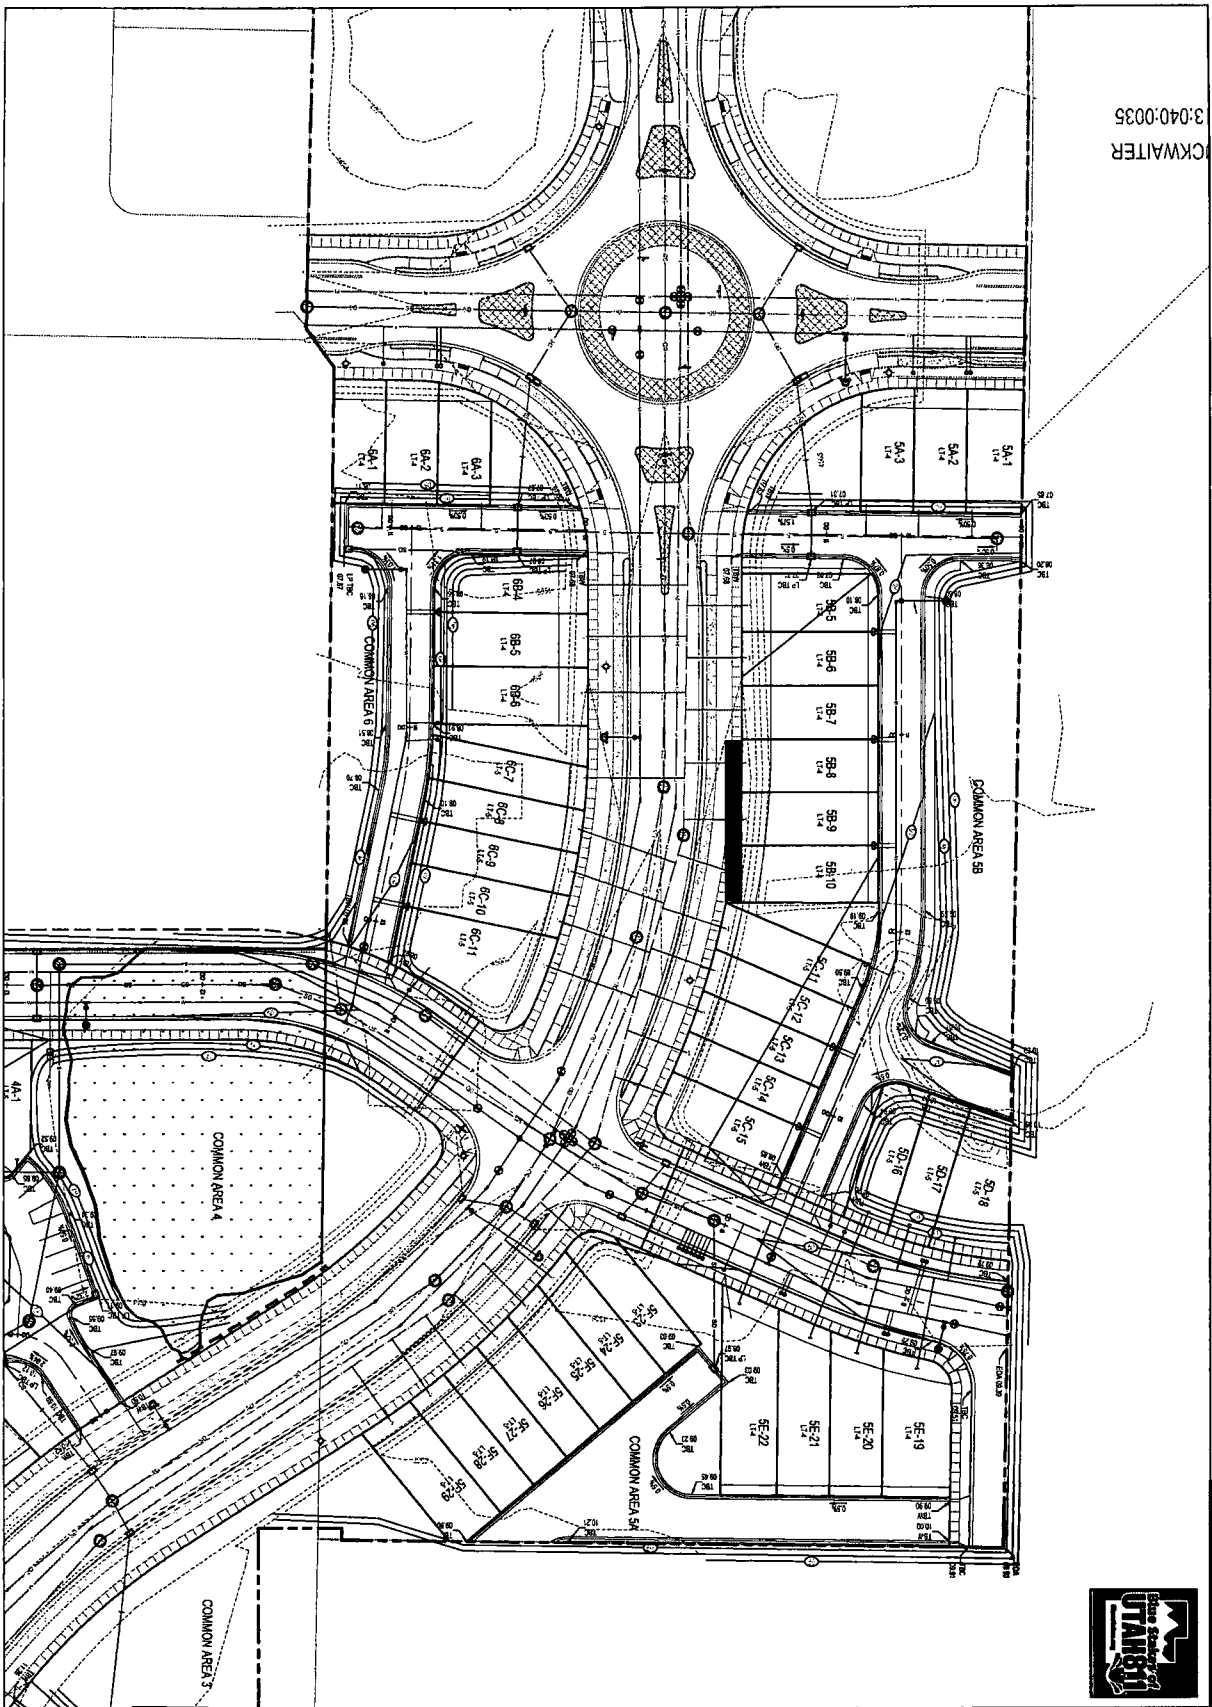

ARDERO
500 South 450 East
Salt Lake City, UT 84143
(801) 464-4000

**LAKESHORE
LANDING**



Berg
CIVIL ENGINEERING
11028 N. Skyway Dr., Suite 200
Salt Lake City, UT 84121
Phone: (801) 464-1777
Fax: (801) 464-1777



**FINAL
BLOCK
PLAN**

DATE: 03/17/21
SCALE: AS SHOWN
**GRADING
PLAN**
C3.1